

REMOTE AMPLIFIER WITH ZONE SELECTOR




FEATURES

- **ZONE CONTROL CIRCUITS**
Speaker zones can be selected individually by means of the CHANNEL switches or altogether using the ALL CALL switch.
- **ANNOUNCEMENTS BY MICROPHONE**
Unobtrusive and easy to use condenser type microphone which is highly sensitive and reproduces high clarity speech. Paging is initiated by pressing the TALK switch.
- **PRE-ANNOUNCEMENT CHIME**
A four tone chime is incorporated for pre-announcement purposes. It is initiated by pressing the CHIME switch.
- **AUXILIARY INPUT FOR INCREASED VERSATILITY**
The auxiliary input can be used for a wide range of signal sources such as cassette deck or tuner, making it the ideal solution for broadcasting background music or radio to the power amplifier.
- **LED OUTPUT LEVEL INDICATION**
The ten segment LED barograph display indicates the instantaneous signal output level of the amplifier. Any excessive input to the amplifier can therefore be monitored and adjusted as necessary.

SPECIFICATION

- **ELECTRICAL** *0dB=0.775Vrms
 - Output Level/Impedance1.2V±200mV, BAL
 - Input Sensitivity/ImpedanceMIC: -60dB/600Ω, BAL
AUX: -20dB/10kΩ, UNBAL
 - Frequency Response(±3dB)MIC: 100Hz~15kHz
AUX: 80Hz~18kHz
 - T.H.DMIC: Less than 0.5%
AUX: Less than 0.2%
 - S/NMIC: Better than 50dB
AUX: Better than 55dB
 - Speaker Control Terminal & Switch.....16 CH
- **GENERAL**
 - Power SourceDC 24V
 - Weight1.2kg(Without Microphone)
 - Dimensions245(W)x60(H)x205(D)mm

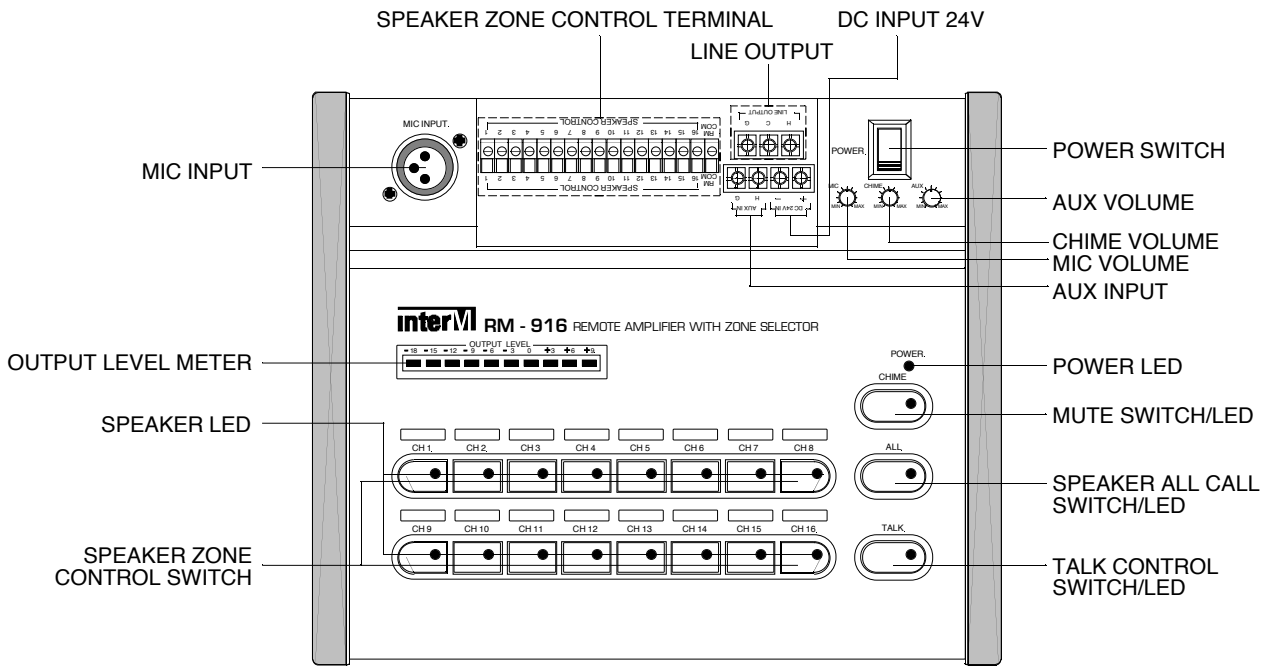

BLOCK DIAGRAM

