

PROGRAM EXCHANGER




FEATURES

- **AUTOMATIC PROGRAM CONVERSION**
Connected with MATRIX equipment, it changes signal when REMOTE, TIMER, EMERGENCY is input.
- **PRIORITY FUNCTION**
By settled input signal priority, intercepting normal signal and then output priority signal.
- **4 INPUT & OUTPUT**
For school, hotel and departments, input and output has each 4 circuits.
- **INDICATOR FUNCTION**
For easier notice of current signal, each input has LED.

SPECIFICATION

- **ELECTRICAL** *0dB=0.775Vrms
 - OperationAutomatic
 - PGM Exchanger Function5 Circuit
 - IndicatorPower LED
Remote 2 LED
Remote 1 LED
Timer LED
Emergency LED
- **GENERAL**
 - Power SourceDC 24V
 - Weight5kg
 - Dimensions.....482(W)×44(H)×280(D)mm

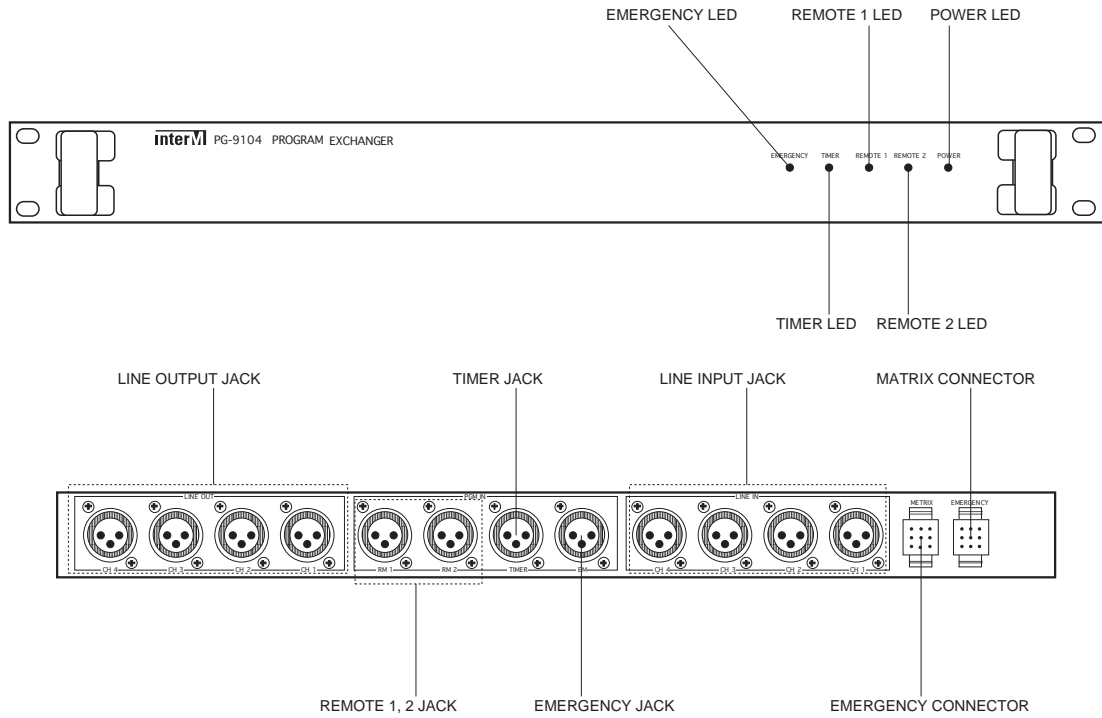

BLOCK DIAGRAM

