Operation Manual

Sound Exchanger

SEG-1404



interM

Welcome

A personal welcome to you from the management and employees of Inter-M

All of the co-workers here at Inter-M are dedicated to providing excellent products with inherently good value, and we are delighted you have purchased one of our products.

We sincerely trust this product will provide years of satisfactory service, but if anything is not to your complete satisfaction, we will endeavor to make things right.

Welcome to Inter-M, and thank you for becoming part of our worldwide extended family!





This symbol is intended to alert the user to the presence of uninsulated “dangerous voltage” within the product’s enclosure that may be of sufficient magnitude to constitute a risk of electric shock to persons.



This symbol is intended to alert the user to the presence of important operation and maintenance (servicing) instructions in the literature accompanying the appliance.

Caution: To prevent electric shock do not use this (polarized) plug with an extension cord, receptacle or other outlet unless the blades can be fully inserted to prevent blade exposure.

Attentions: Pour prévenir les chocs électriques ne pas utiliser cette fiche polarisée avec un prolongateur, une prise de courant on une autre sortie de courant, sauf si les lames peuvent étre insérées à fond sans en laisser aucune partie à découvert.
Pour deconnecter completement l’appareil du reseau d’alimentation. deconnecter le cordon d’alimentation de la prise murale.
La prise du reseau d’alimentation doit demeurer aisement accessible.

WARNING

To prevent fire or shock hazard, do not expose the unit to rain or moisture.

*WARNING FOR YOUR PROTECTION PLEASE READ THE FOLLOWING-WATER AND MOISTURE: Unit should not be used near water(e.g. near a bathtub, washbowl, kitchen sink, laundry tub, in a wet basement, or near a swimming pool, etc). Care should be taken so than objects do not fall and liquids are not spilled into the enclosure through openings.
*Do not install this equipment in a confined space such as a book case or similar unit.
*Warning : To reduce the risk of fire or electric shock, do not expose this apparatus to rain or moisture and objects filled with liquids, such as vases, should not be placed on this apparatus.
*This apparatus shall be connected to a mains socket outlet with a protective earthing connection.
*To completely disconnect this apparatus from the AC mains, disconnect the power supply cord plug from the AC receptacle.
*The mains plug of the power supply cord shall remain readily accessible.

CAUTION
*These servicing instructions are for use by qualified service personnel only. To reduce the risk of electric shock, do not perform any servicing other than that contained in the operating instructions unless you are qualified to do so.

NOTE
*This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

Contents

Unpacking 2

Installation
- Environment 2
- Important Safety Instructions 2

Features 3

Contents and Accessories 3

Front Panel 4

Rear Panel 5

How to operate 7

Applications 8

Block Diagram 9

Specifications 10

Service
- Procedures 12
- Schematic 12
- Parts List 12

Variations and Options 12

Warranty 12

Unpacking

Although your SEG-1404 is neither complicated nor difficult to operate, we recommend you take a few minutes to read this brief manual and familiarize yourself with the important information regarding product features, setup and operation.

As with most electronic devices, we strongly recommend you retain the original packaging. In the unlikely event the product must be returned for servicing, the original packaging (or reasonable equivalent) is required.

Installation

Environment
Never place this product in an environment which could alter its performance or reduce its service life. Such environments usually include high levels of heat, dust, moisture, and vibration.

IMPORTANT SAFETY INSTRUCTIONS

1. Read these instructions.
2. Keep these instructions.
3. Heed all warnings.
4. Follow all instructions.
5. Do not use this apparatus near water.
6. Clean only with dry cloth.
7. Do not block any ventilation openings. Install in accordance with the manufacturer's instructions.
8. Do not install near any heat sources such as radiators, heat registers, stoves, or other apparatus (including amplifiers) that produce heat.
9. Do not defeat the safety purpose of the polarized or grounding-type plug. A polarized plug has two blades with one wider than the other. A grounding type plug has two blades and a third grounding prong. The wide blade or the third prong are provided for your safety. If the provided plug does not fit into your outlet, consult an electrician for replacement of the obsolete outlet.
10. Protect the power cord from being walked on or pinched particularly at plugs, convenience receptacles, and the point where they exit from the apparatus.
11. Only use attachments/accessories specified by the manufacturer.
12. Use only with the cart, stand, tripod, bracket, or table specified by the manufacturer, or sold with the apparatus. When a cart is used, use caution when moving the cart/apparatus combination to avoid injury from tip-over.
13. Unplug this apparatus during lightning storms or when unused for long periods of time.
14. Refer all servicing to qualified service personnel. Servicing is required when the apparatus has been damaged in any way, such as power-supply cord or plug is damaged, liquid has been spilled or objects have fallen into the apparatus, the apparatus has been exposed to rain or moisture, does not operate normally, or has been dropped.



Features

- **Automatic switching of programs (broadcasting)**
  Switches the audio signal automatically when there is an Emergency broadcasting.


- **Supports 4-Bus**
  SEG-1404 provides 4 inputs and 4 outputs for more flexible installation.

- **Indicators**
  SEG-1404 has LED indicators for each channel. These indicators enable easy monitoring of each channel.

Contents and Accessories

1. **AC Power Cord x 1EA**
2. **5P Euro Terminal Block x 1EA**
3. **Wall-Mount Screw x 4EA**
4. **Washer x 4EA**
5. **User manual x 1EA**

Front Panel

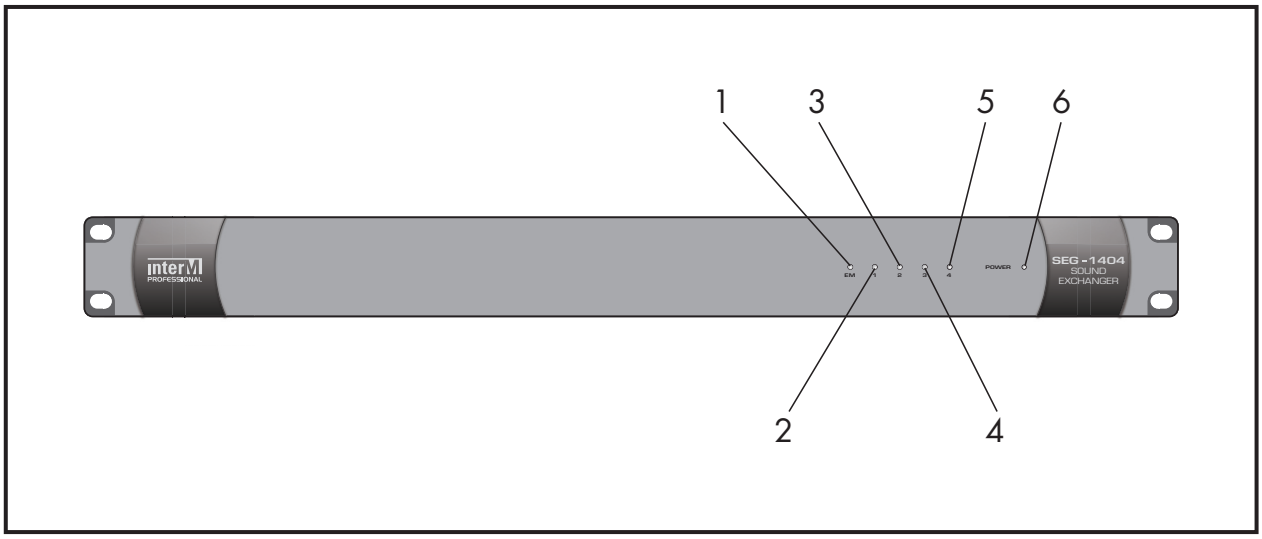

1. **EM LED**
   This LED lights up when an emergency broadcasting is active.

2. **INPUT INDICATOR (LINE 1)**
   This LED lights up when there is an audio signal in the INPUT 1


3. **INPUT INDICATOR (LINE 2)**
   This LED lights up when there is an audio signal in the INPUT 2

4. **INPUT INDICATOR (LINE 3)**
   This LED lights up when there is an audio signal in the INPUT 3

5. **INPUT INDICATOR (LINE 4)**
   This LED lights up when there is an audio signal in the INPUT 4

6. **POWER INDICATOR**
   This LED lights up when the device is connected to an AC mains

Rear Panel

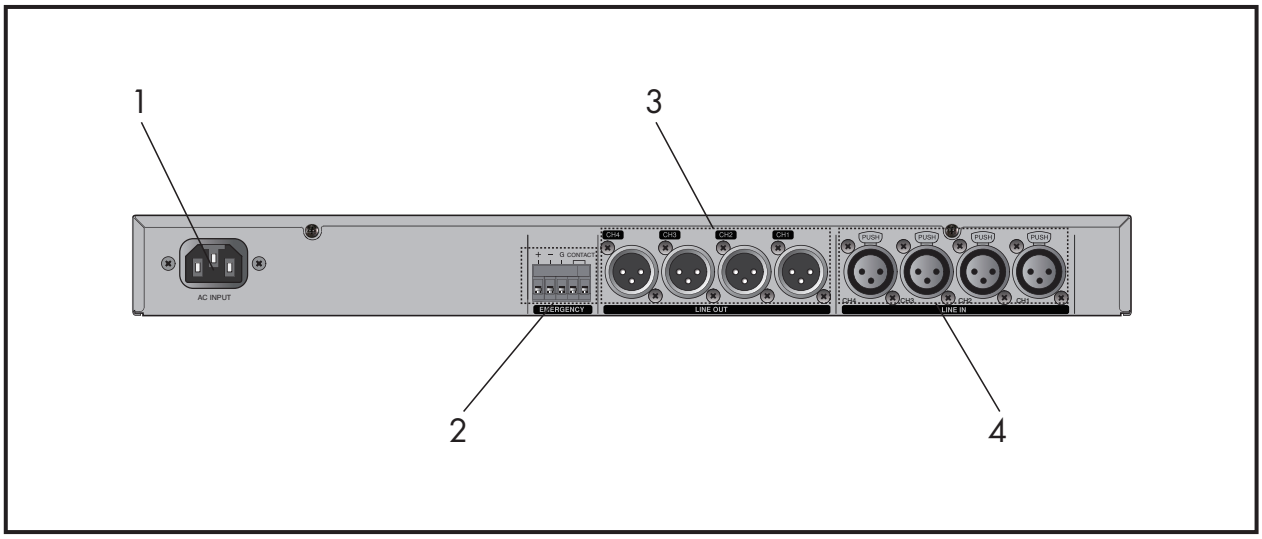


1. AC POWER INPUT

This port supplies the AC power to the device. Do not bend, twist, heat, cut, or pull the cord. This would damage the AC cord and cause fire or electrocution.

2. EMERGENCY

Connect an audio input (Balanced) and a contact closure for Emergency broadcasting




- Connect balanced audio to +, -, G respectively.
- Connect a contact closure to CONTACT
  (When the contact closure input is shorted, all broadcastings from LINE INPUT 1~4 are switched to the audio signal of the Emergency audio input.

3. LINE OUTPUT

In normal conditions, SEG-1404 passes through the audio signals from the LINE INPUT 1~4 to LINE OUTPUT 1~4 respectively. A balanced connection is recommended, but using an unbalanced connection is possible. Short the – and G to connect as unbalanced.

4. LINE INPUT

SEG-1404 can receive 4 different audio inputs. A balanced connection is recommended, but using an unbalanced connection is possible. Short the – and G to connect as unbalanced.

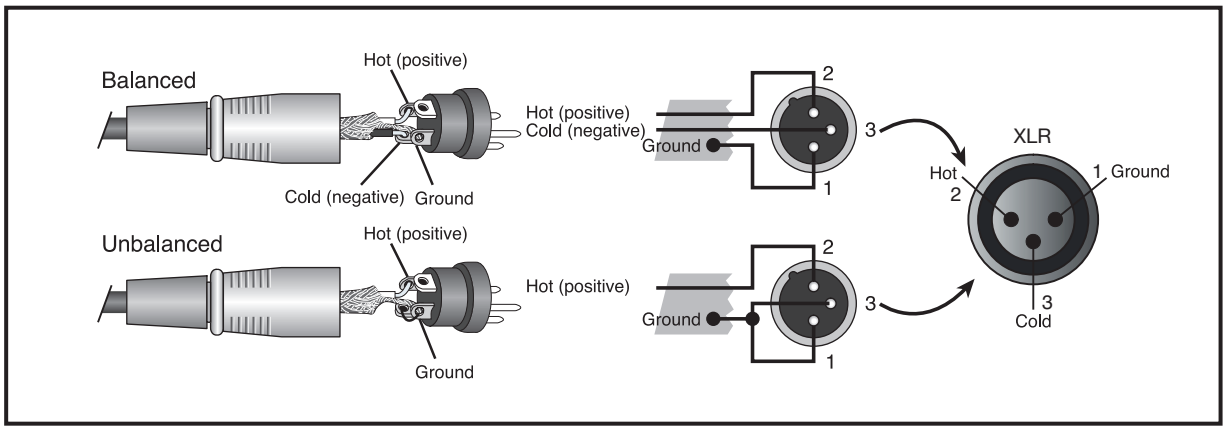

Locate Phantom switch to OFF when using unbalanced cable.

How to operate


1. Supply AC power to SEG-1404. When SEG-1404 is connected to a power distributor (PD-6359A), turn the power of the power distributor on. When AC power is supplied, the POWER LED lights up.

2. Turn the source device on and check the broadcasting output is normal.


3. After checking the normal broadcasting, test the emergency broadcasting to check if the SEG-1404 switches the broadcasting correctly. (The emergency audio signal is forwarded to all outputs 1~4.)

4. When the test is finished, make sure that the AC power voltage and pins of the EMERGENCY contact closure are in operable condition.

Applications

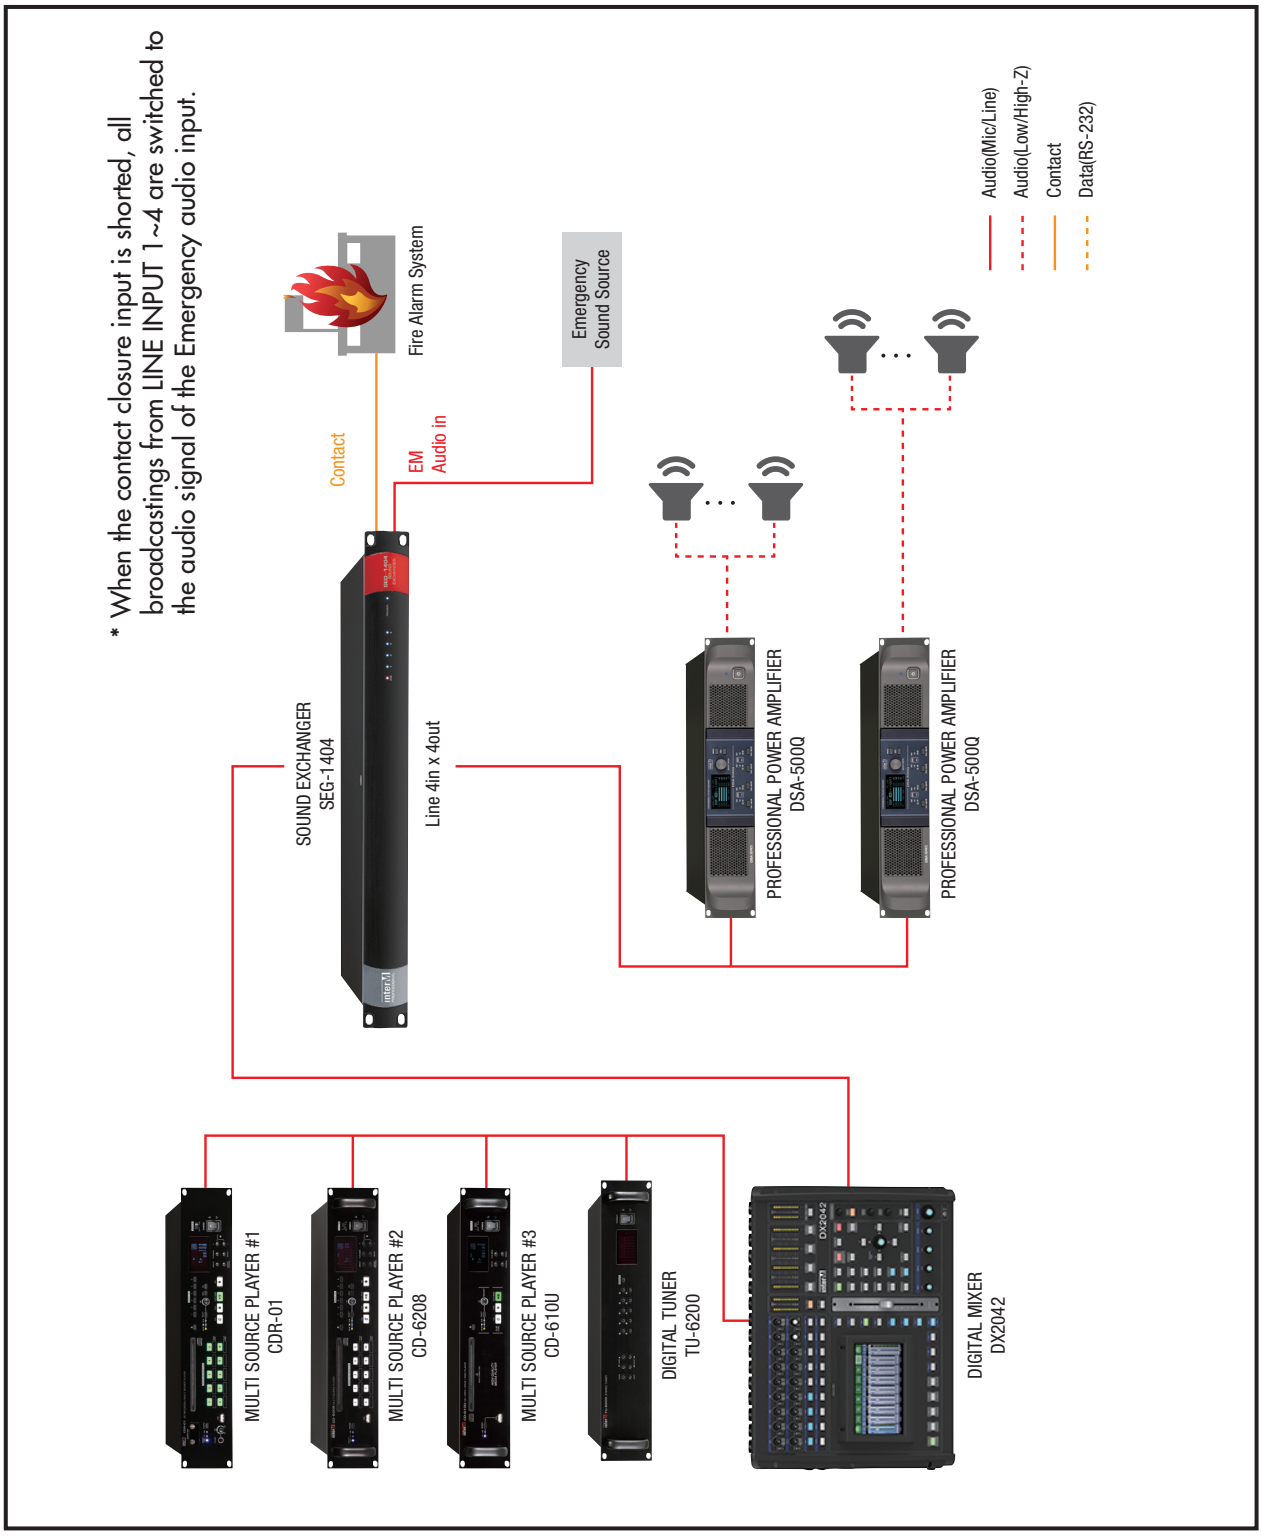

Block Diagram

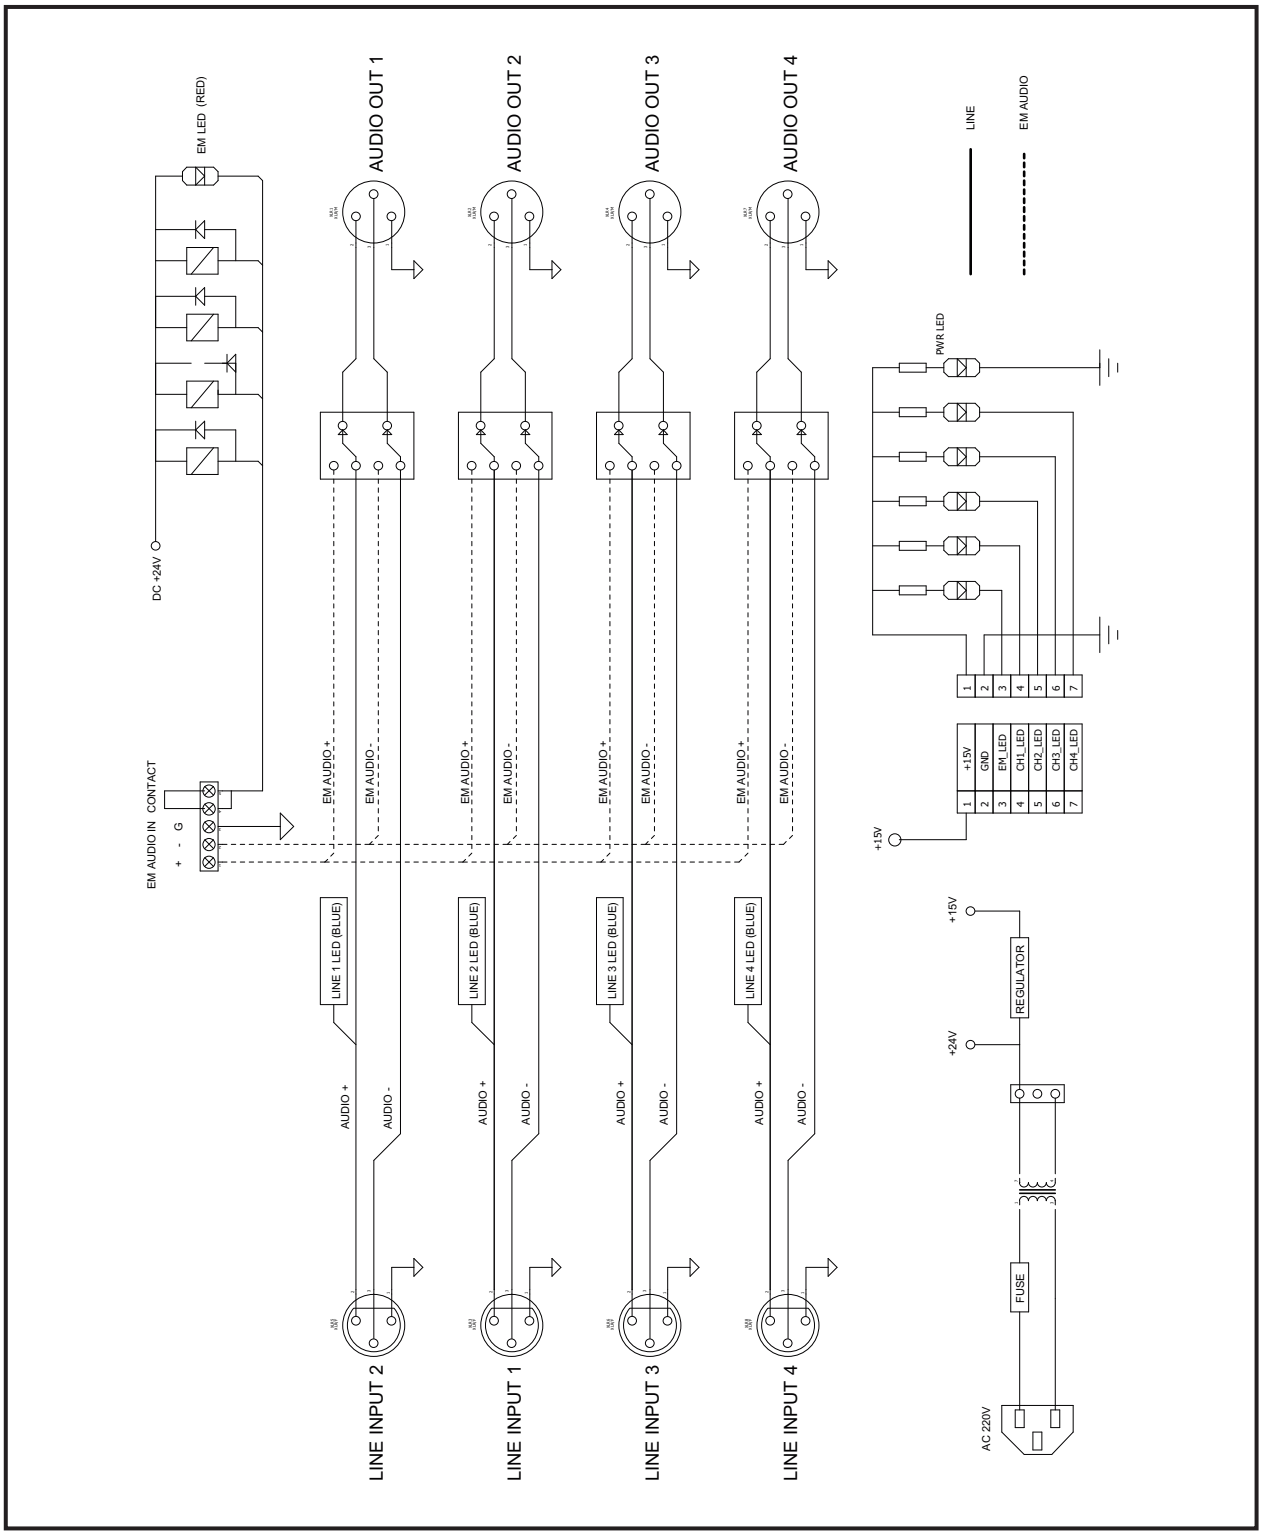


Specifications

	SEG-1404
Switching	Automatic
Program audio channels	4
Indicators	POWER LED
	LINE INPUT 1 LED
	LINE INPUT 2 LED
	LINE INPUT 3 LED
	LINE INPUT 4 LED
	EM LED
Operating temperature	-10℃~+40℃
Operating power	AC 230-240V~/60Hz
Power Consumption	5W
Weight(set)	2.9kg/6.39lb
Dimensions(set)	482(W) x 44(H) x 283(D)mm/18.97(W) x 1.73(H) x 11.14(D)in

* Design and specification are subject to be changed for the improvement of product quality without pre notice.

※ DIMENSIONS

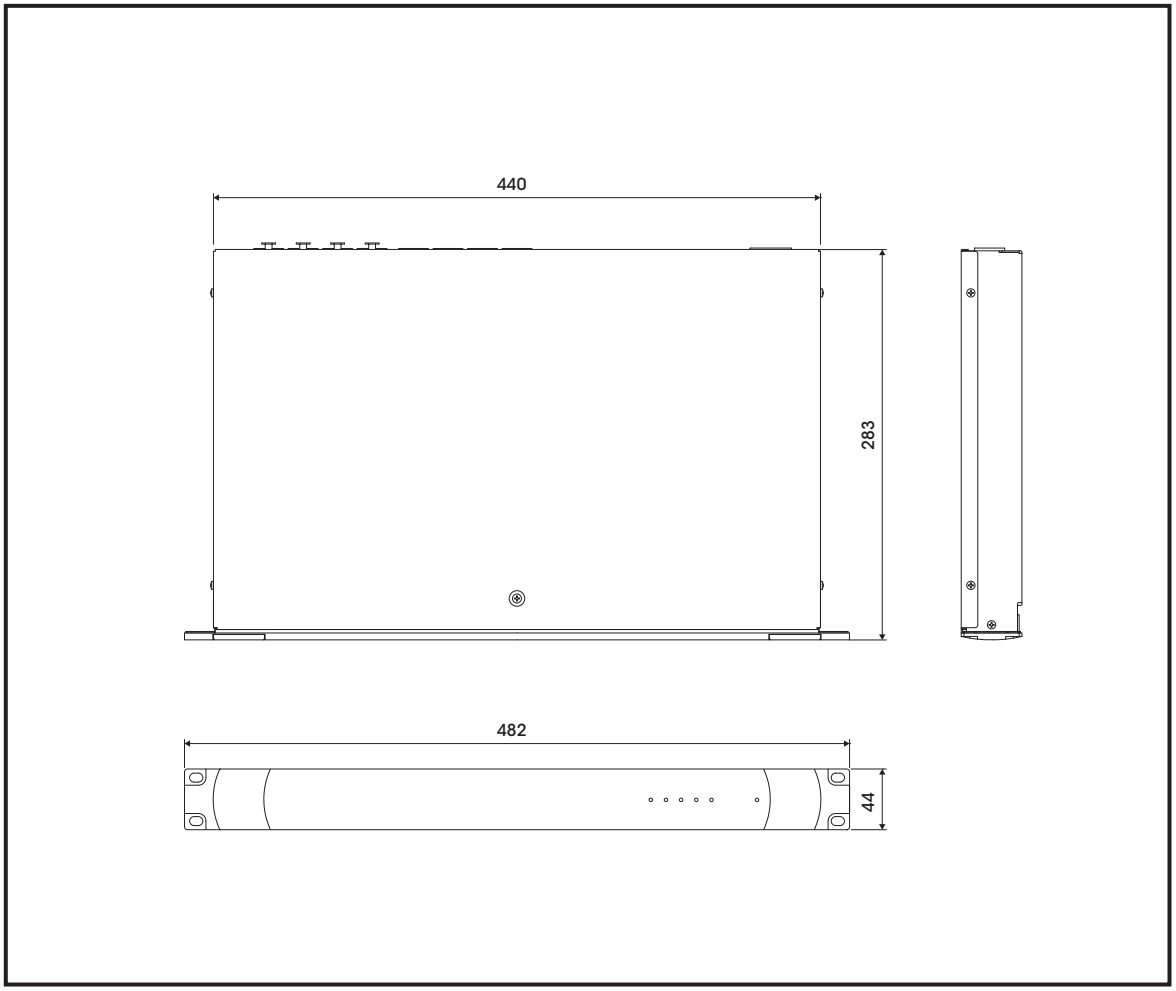

Service

Procedures
Take steps to insure the problem is not related to operator error or other products within the system. Information provided in the troubleshooting portion of this manual may help with this process. Once it is certain that the problem is related to the product contact your warranty provider as described in the warranty section of this manual.

Schematic
A Schematic is available by contacting your warranty provider.

Parts List
A Parts List is available by contacting your warranty provider.

Variations and Options

Variations
Products supplied through legitimate sources are compatible with local AC power requirements.

Options
No optional items are available for this product.

Warranty

Warranty terms and conditions vary by country and may not be the same for all products. Terms and conditions of warranty for a given product may be determined first by locating the appropriate country which the product was purchased in, then by locating the product type.

To obtain specific warranty information and available service locations contact Inter-M directly or the authorized Inter-M Distributor for your specific country or region.

Inter-M, Ltd. (Korea) began operations in 1983.

Since then, Inter-M has grown to become one of the largest manufacturers
of professional audio and commercial sound electronics equipment in the world.

Inter-M has gained worldwide recognition for its own branded products,
as well as private label manufacturing of electronics sold under other names (OEM).

The company is no longer just a Korean company, but rather a global company
that is truly international in scope, with factories and offices in Korea and China,
and sales and marketing operations located in Japan, Europe, and the U.S.A.

With more than 850 employees around the globe,
Inter-M is well-poised for further growth and expansion.

Inter-M Americas, INC.
5666 CORPORATE AVE. CYPRESS, CA 90630
TEL : +1-714-828-2200, FAX : +1-714-828-2210
Home Page : http://www.inter-m.net, E-mail : info@inter-m.net

Inter-M Corporation
SEOUL OFFICE : 719, DOBONG-RO, DOBONG-GU, SEOUL, KOREA
TEL : +82-2-2289-8140~8, FAX : +82-2-2289-8149
Home Page : http://www.inter-m.com, E-mail : overseas@inter-m.com

MADE IN KOREA
October 2020