


CU-21FO/22FO/24FO

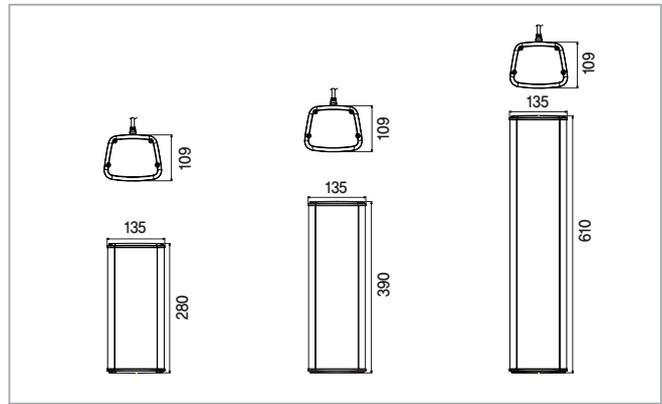


- ◆ Use 4" full-range of unit having excellent sound quality/articulation/durability
- ◆ Outdoor type, 100V/70V line of high impedance model
- ◆ Use solid aluminum body and flame retarding grill
- ◆ Use titanium color which does not damage the landscape of outdoor facility and prevents the discoloration even for long time use with clean & simple design
- ◆ Excellent waterproof, moistureproof, and dustproof (IP34)
- ◆ Have 3 types of models which you can select the optimal power among 10W/20W/40W depending on the use
- ◆ Show the maximum feature of exclusive speaker unit with the use of high-performance matching transformer produced by Inter-M
- ◆ Easy input power selection through wiring
- ◆ Provide exclusive knuckle bracket which enables the angle adjustment 30 degree downward and each 90 degree toward right and left

SPECIFICATION


Model	CU-21FO		CU-22FO		CU-24FO	
Type	Single 4" Full-range Column Speaker		Dual 4" Full-range Column Speaker		Quad 4" Full-range Column Speaker	
Unit	4" x 1		4" x 2		4" x 4	
Power Handling(AES)	10W		20W		40W	
Input Power	100V	10/7.5/5/2.5W	20/15/10/5W		40/30/20/10W	
	70V	10/7.5/5/2.5W	20/15/10/5W		40/30/20/10W	
Impedance	100V	1k/1.3k/2k/4kΩ	500/660/1k/2kΩ		250/330/500/1kΩ	
	70V	500/660/1k/2kΩ	250/330/500/1KΩ		125/160/250/500Ω	
Power Selection	By Wiring		By Wiring		By Wiring	
Frequency Range(-10dB)	127Hz ~ 20kHz		137Hz ~ 20kHz		128Hz ~ 20kHz	
Frequency Range(-20%)	100Hz ~ 20kHz		108Hz ~ 20kHz		94Hz ~ 20kHz	
Sensitivity(1W/1m, 1kHz)	87dB		90dB		91dB	
Maximum SPL[Cont]	97dB		103dB		107dB	
Nominal Dispersion(H)	1kHz	205° x 154°	220° x 120°		208° x 60°	
	4kHz	122° x 141°	103° x 33°		106° x 16°	
Input Connection	Bi-Wired INPUT Line Direct Connection					
Enclosure Material	Body : AL/Top, Bottom : Composite PP(GP-3152F), INSERT NUT					
Enclosure Color	Body : Light Brown/Top, Bottom : Black					
Grill Material	EGI 0.8T		EGI 0.8T		EGI 0.8T	
Grill Color	Titanium		Titanium		Titanium	
Weight(Net)	1.8kg		3kg		4.65kg	
Dimensions(Net, WxHxD, mm)	135 x 280 x 109		135 x 390 x 109		135 x 610 x 109	
Weather Resistant	IP34		IP34		IP34	
Flame Resistant	O		O		O	
Certification	-		-		-	
Included Accessories	U Bracket		U Bracket		U Bracket	

FREQUENCY RANGE


• CU-21FO



• CU-24FO





• CU-22FO




POLAR PATTERN (1kHz/4kHz)

— 1kHz
— 4kHz

• CU-21FO



• CU-22FO



• CU-24FO

