

SERVICE

MANUAL

R E L A Y


GROUP

RG-9116

interM

ELECTRICAL PARTS LIST (RG-9116)

Ref No.	Part No.	Description	Value	Qty
MAIN B'D (4003504100)				
CON3-4	4428595920	5569-20A(210)/MH5557-NR	5569-20A	2
CON1-2	4428595924	5569-24A(210)/MH5557-NR	5569-24A	2
D1-32	2058100996	DIODE RECTIFIER LT1N4006(4007)	1N 4006	32
R17	3009392973	RES CF 3.9K 1/5W J N	3.9K	1
ERLY1-16 NRLY1-16	5528009700	RELAY HR710-2PP DC12V	RELAY HR710-2PP DC12V	32
CON6	4428595002	LW5267/LWB0640/2.5MM-02P	LW 2P	1
CON5	4428598304	WAFER LW-0640-4P	LW 4P	1
CON7-8	4428598309	CONNECTOR WAFER LW-0640-9P	CONNECTOR WAFER 9P	2
POWER LED B'D (4003504100)				
LED17	2300050105	LED LTL-307E-041A LITEON	307E-041A	1
AN1	4355902110	CON ASSY 2P RG-9116	CON ASSY 2P	1
LED1 B'D (4003504110)				
LED1-8	2300050105	LED LTL-307E-041A LITEON	307E-041A	8
R1-8	3009392973	RES CF 3.9K 1/5W J N	3.9K	8
AN2	4355902010	CON ASSY 9P RG-9116	CON ASSY 9P	1
LED2 B'D (4003504120)				
LED9-16	2300050105	LED LTL-307E-041A LITEON	307E-041A	8
R9-16	3009392973	RES CF 3.9K 1/5W J N	3.9K	8
AN3	4355902010	CON ASSY 9P RG-9116	CON ASSY 9P	1
ASS'Y				
CON ASSY	4353998610	CON ASSY 1265-24P PLUG RG823	CON ASSY	2
CON ASSY	4353998620	CON ASSY 1265-24P RG-823	CON ASSY	2
CON ASSY	4355900710	CON ASSY 2P	CON ASSY 2P	1
CON ASSY	4355918209	CON ASSY 2P	CON ASSY 2P	1
CON ASSY	4353987410	CONNECTOR ASSY 1625(24P-24P)	CONNECTOR ASSY 1625(24P-24P)	2
CON ASSY	4353987810	CONNECTOR ASSY 1625(24P-20P)	CONNECTOR ASSY 1625(24P-20P)	2
CON ASSY	4355901710	CON ASSY 4P	CON ASSY 4P	1

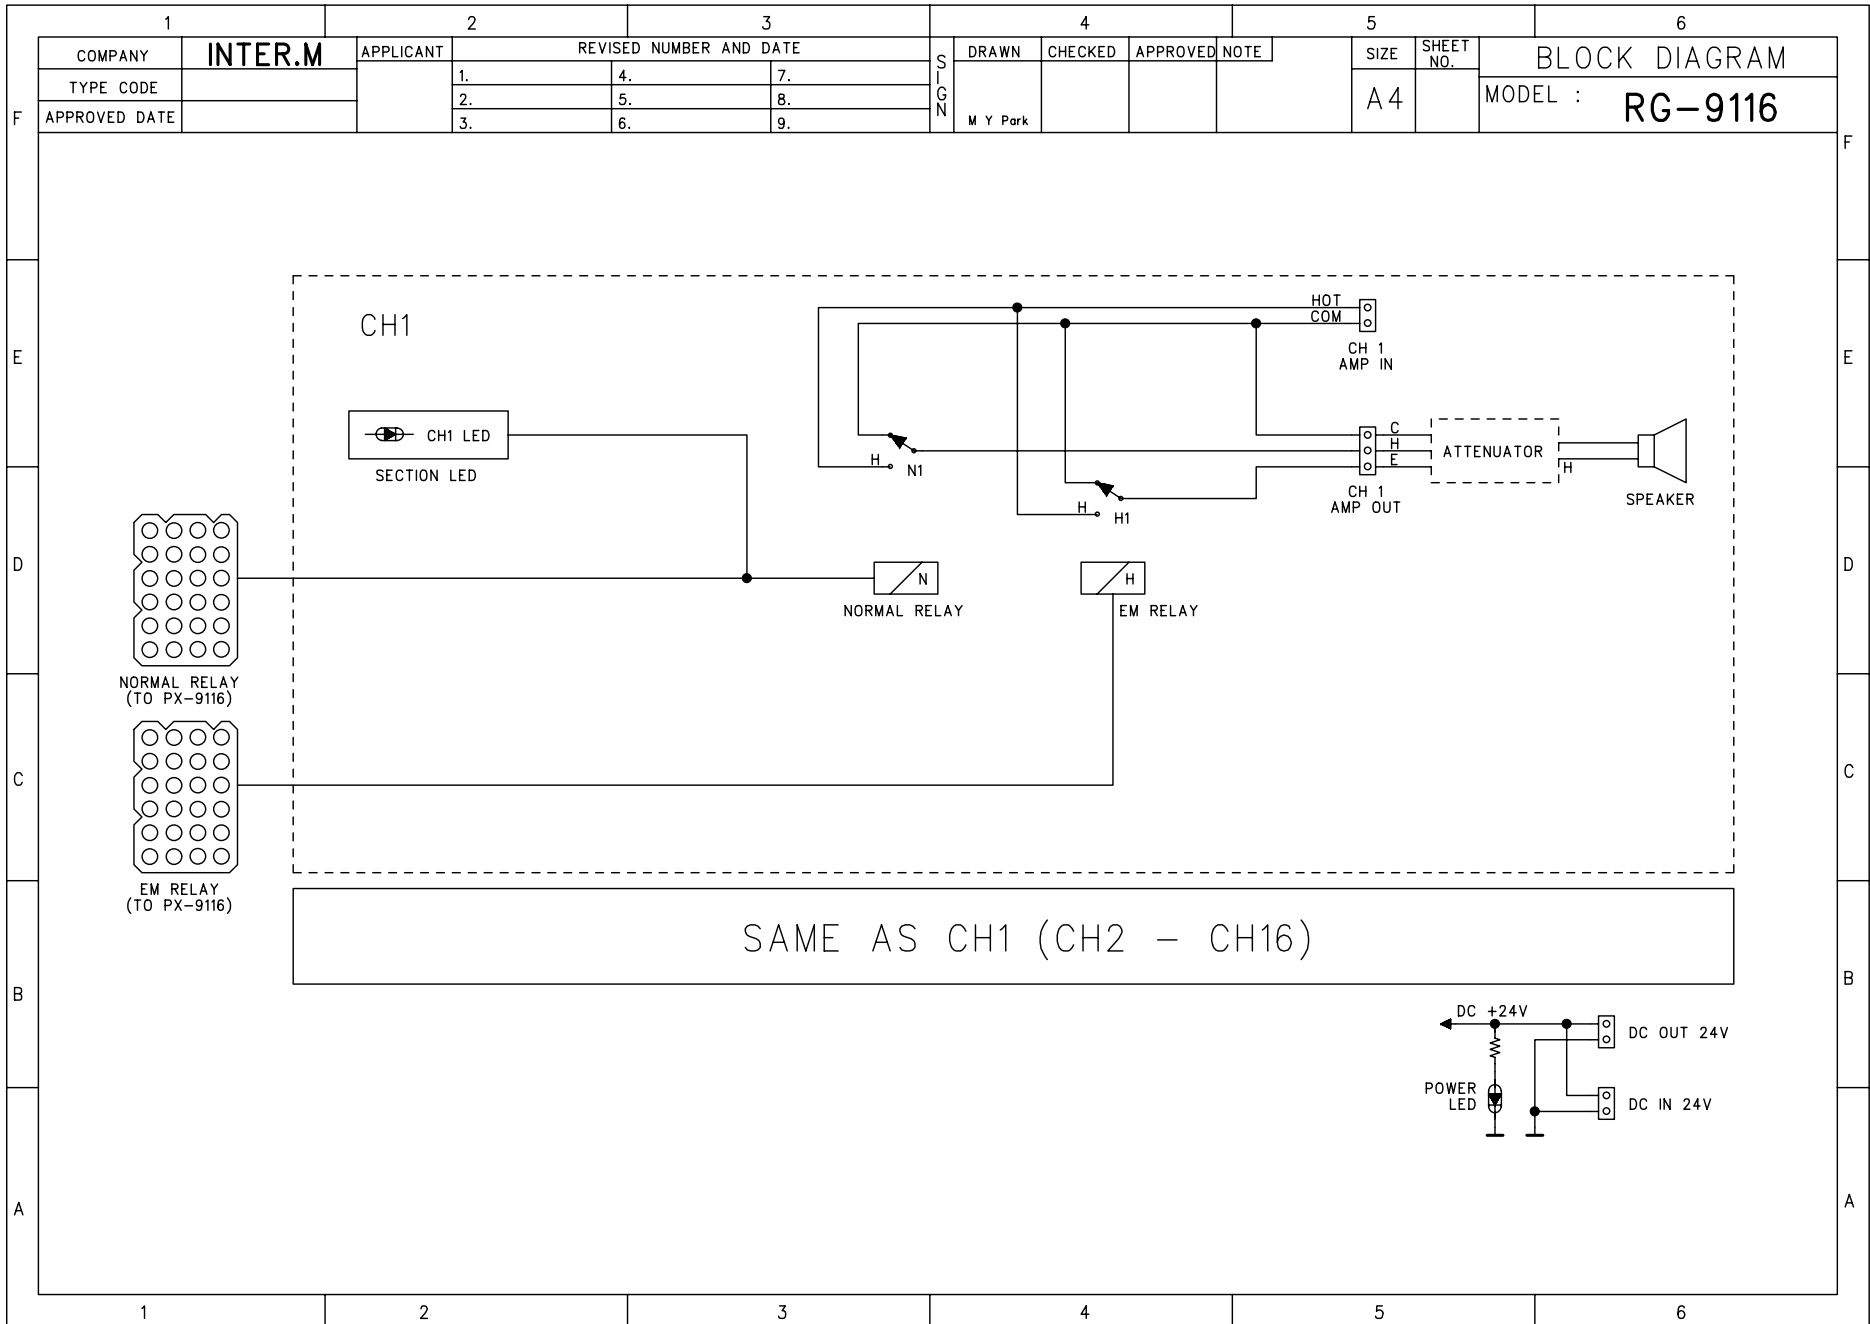

SPEAKER OUTPUT LINES

CH	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
HOT	1	4	7	10	13	16	19	22	1	4	7	10	13	16	19	22
COM	2	5	8	11	14	17	20	23	2	5	8	11	14	17	20	23
EMC	3	6	9	12	15	18	21	24	3	6	9	12	15	18	21	24

OUTPUT A
OUTPUT B

