Column Speaker

CU-9030/9060/9120



CU-9030 CU-9060 CU-9120

FEATURES

- **Convenient and User-friendly Design for Installation**
- **Elegant Design**
- **Delicate and Rich Sound Play and Maintain High Reliability due to Strong Durability**
- **Easy Adjustment of Angle of Beam Spread by Using Bracket**
- **IP65**

SPECIFICATIONS

Model		CU-9030	CU-9060	CU-9120
Unit		4″		
Power Handling (AES)		30W	60W	120W
Input Power	100V	30W/15W	60W/30W	120W/60W
	70V	-	-	-
Impedance	100V	330Ω/660Ω	166Ω/330Ω	83Ω/166Ω
	70V	-	-	-
	LOW	-	-	-
Frequency Range (-20%)		88Hz ~ 20kHz	86Hz ~ 20kHz	87Hz ~ 20kHz
Sensitivity (1W/1m)		89dB	92dB	93dB
Maximum SPL [Cont]		104dB	110dB	114dB
Nominal Dispersion (HxV)	1kHz	150°x160°	170°x110°	160°x50°
	4kHz	110°x140°	90°x40°	100°x50°
Weight (Net)		3.1kg / 6.83lb	4.7kg / 10.36lb	6.6kg / 14.55lb
Dimensions (Net, WxHxD)		160x320x125mm 6.3x12.6x4.9in	160x450x125mm 6.3x17.7x4.9in	160x650x125mm 6.3x25.6x4.9in

* The design and specifications of this product may be changed without prior notice to improve the quality of the product.

COLUMN SPEAKER

Column Speaker

CU-9030/9060/9120



FREQUENCY RESPONSE

►CU-9030

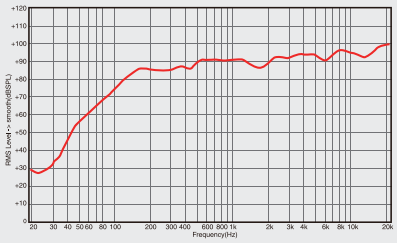

►CU-9060

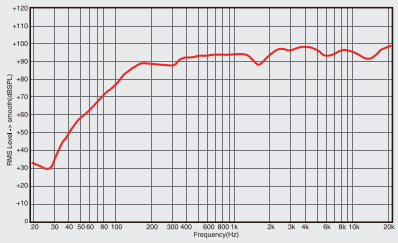

►CU-9120

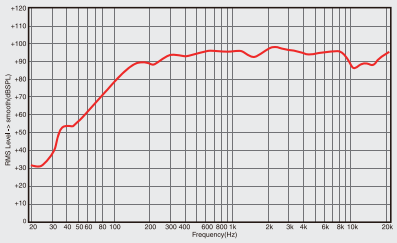

CONNECT THE SPEAKER CABLES

►CU-9030
►CU-9060
►CU-9120



INSTALLING THE SPEAKERS

Install speaker to wall or other secure location with the supplied mounting bracket.

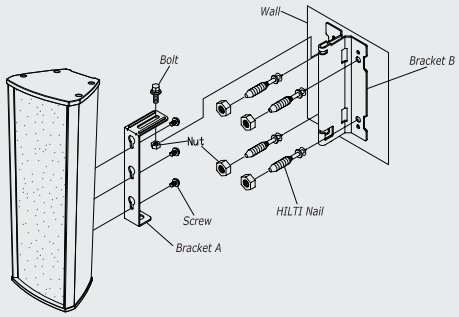

※Caution: Special care is required as speaker will fall off during installation and a person may be injured.

DIMENSIONAL

►CU-9030



►CU-9060

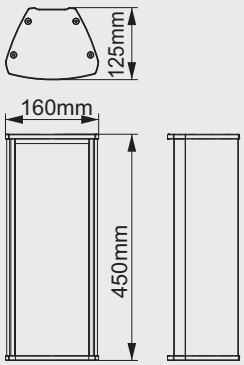

►CU-9120

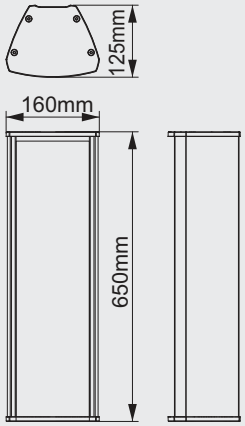

Inter-M Corporation

- **Office :** 719, DOBONG-RO, DOBONG-GU, SEOUL, KOREA
- **Tel :** +82-2-2289-8140~8, **Fax :** +82-2-2289-8149
- **Home page:** http://www.inter-m.com, **E-mail:** overseas@inter-m.com

Inter-M Corp. (IMA)

- **Office :** 5666 CORPORATE AVE. CYPRESS, CA 90630
- **Tel :** +1-714-828-2200, **Fax :** +1-714-828-2210
- **E-mail :** info@inter-m.net, **Home Page :** www.inter-m.net

NO: 147760