Remote MIC Extender

RME-6108

6000 SYSTEM



Remote MIC Extender

RME-6108



The RME-6108 remote microphone extender adds additional microphone stations

- **REMOTE MIC EXTENSION**
  - 8 RM-6024 can be connects to single RME-6108
  - 6000 1BUS: expansion up to 16 units of RM-6024
  - 6000 8BUS: expansion up to 32 units of RM-6024
- **PRIORITY SETTING FUNCTION**
  - Sets the priority for each connected RM-6024.
- **STATUS DISPLAY LED**
  - It shows the remote amp status such as connection/operation/communication of remote mic.
- **STAND-BY LED**
  - It shows the remote amp status such as power and communication fault

FRONT/REAR PANEL



1 RM(REMOTE MIC) OPERATION DISPLAY LED (1CH ~ 8CH)
2 STAND-BY LED



1 OUTPUT TERMINAL
2 INPUT TERMINAL (1CH ~ 8CH)
3 DC INPUT TERMINAL

APPLICATIONS

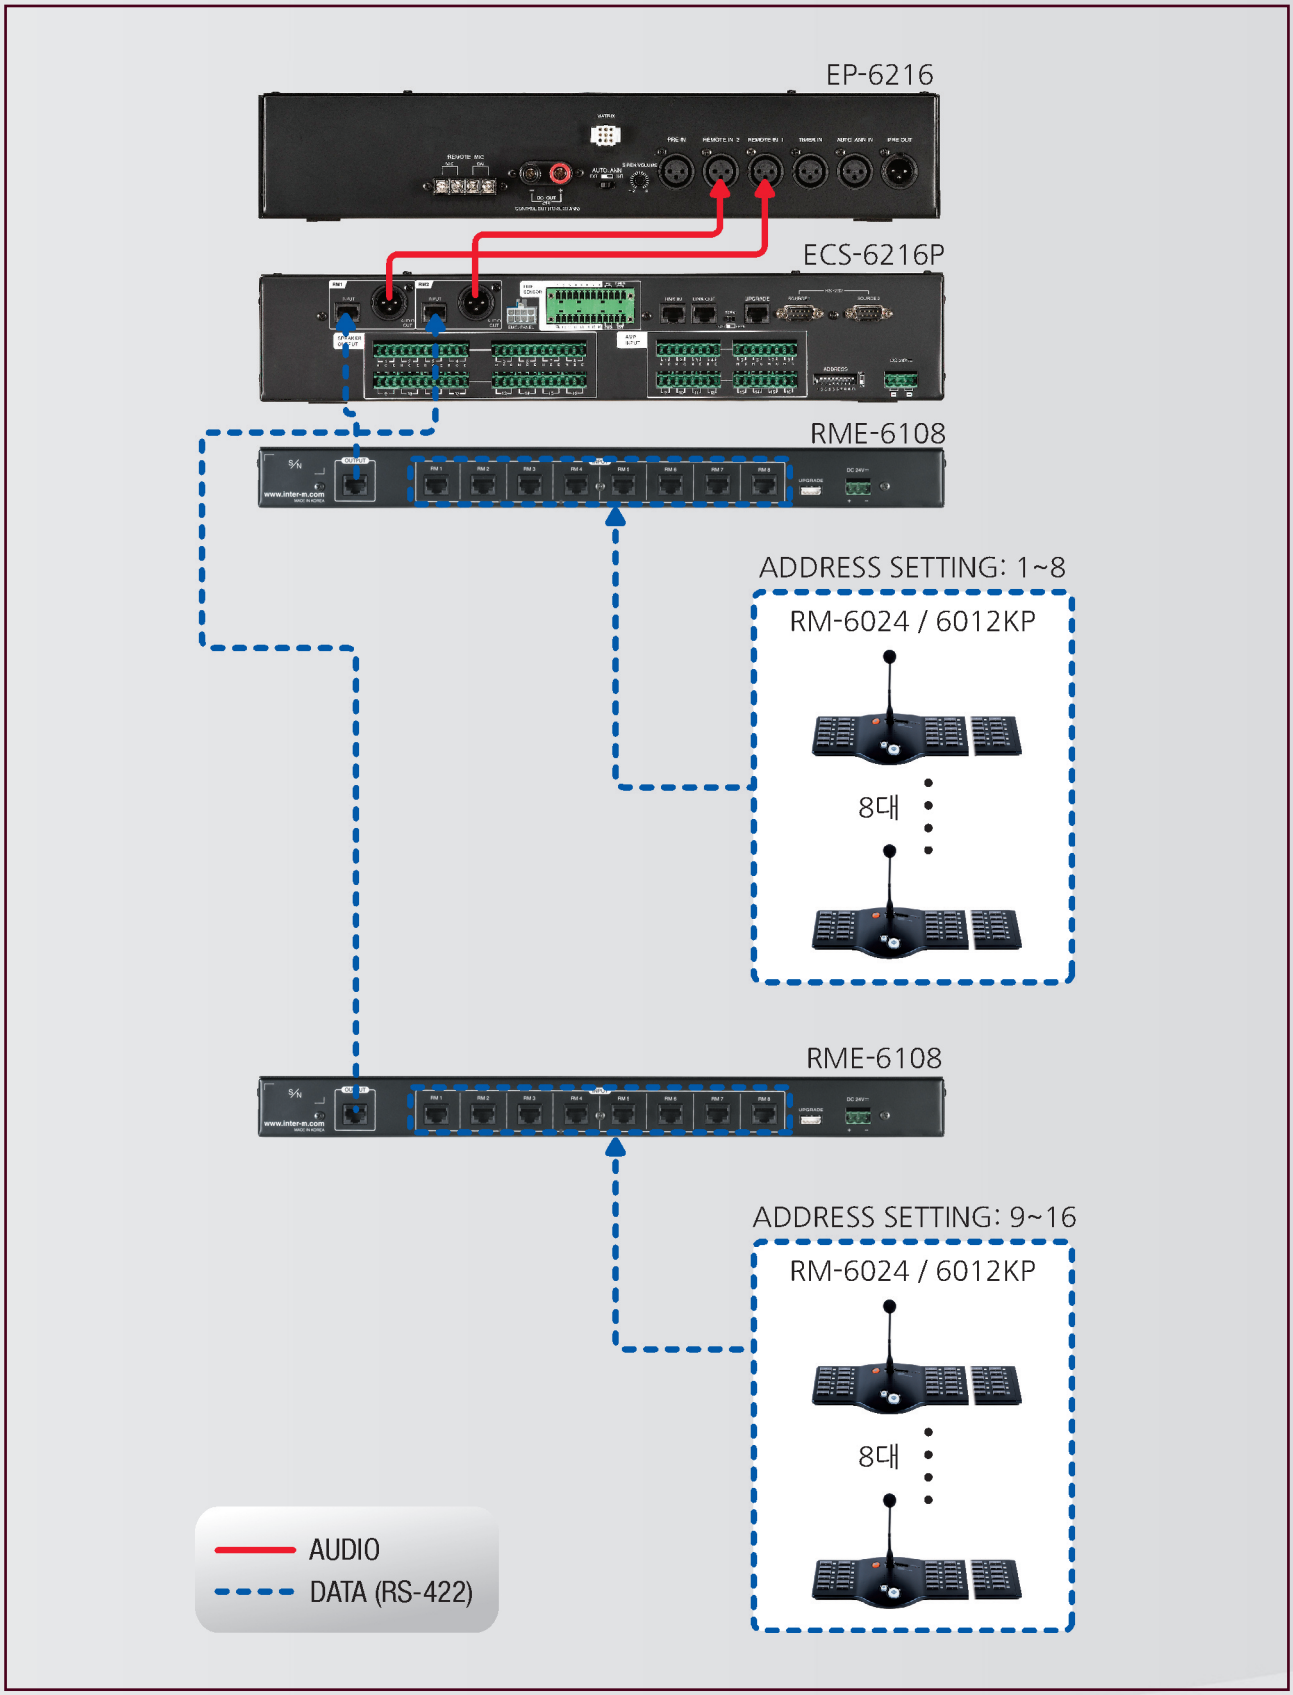

BLOCK DIAGRAM

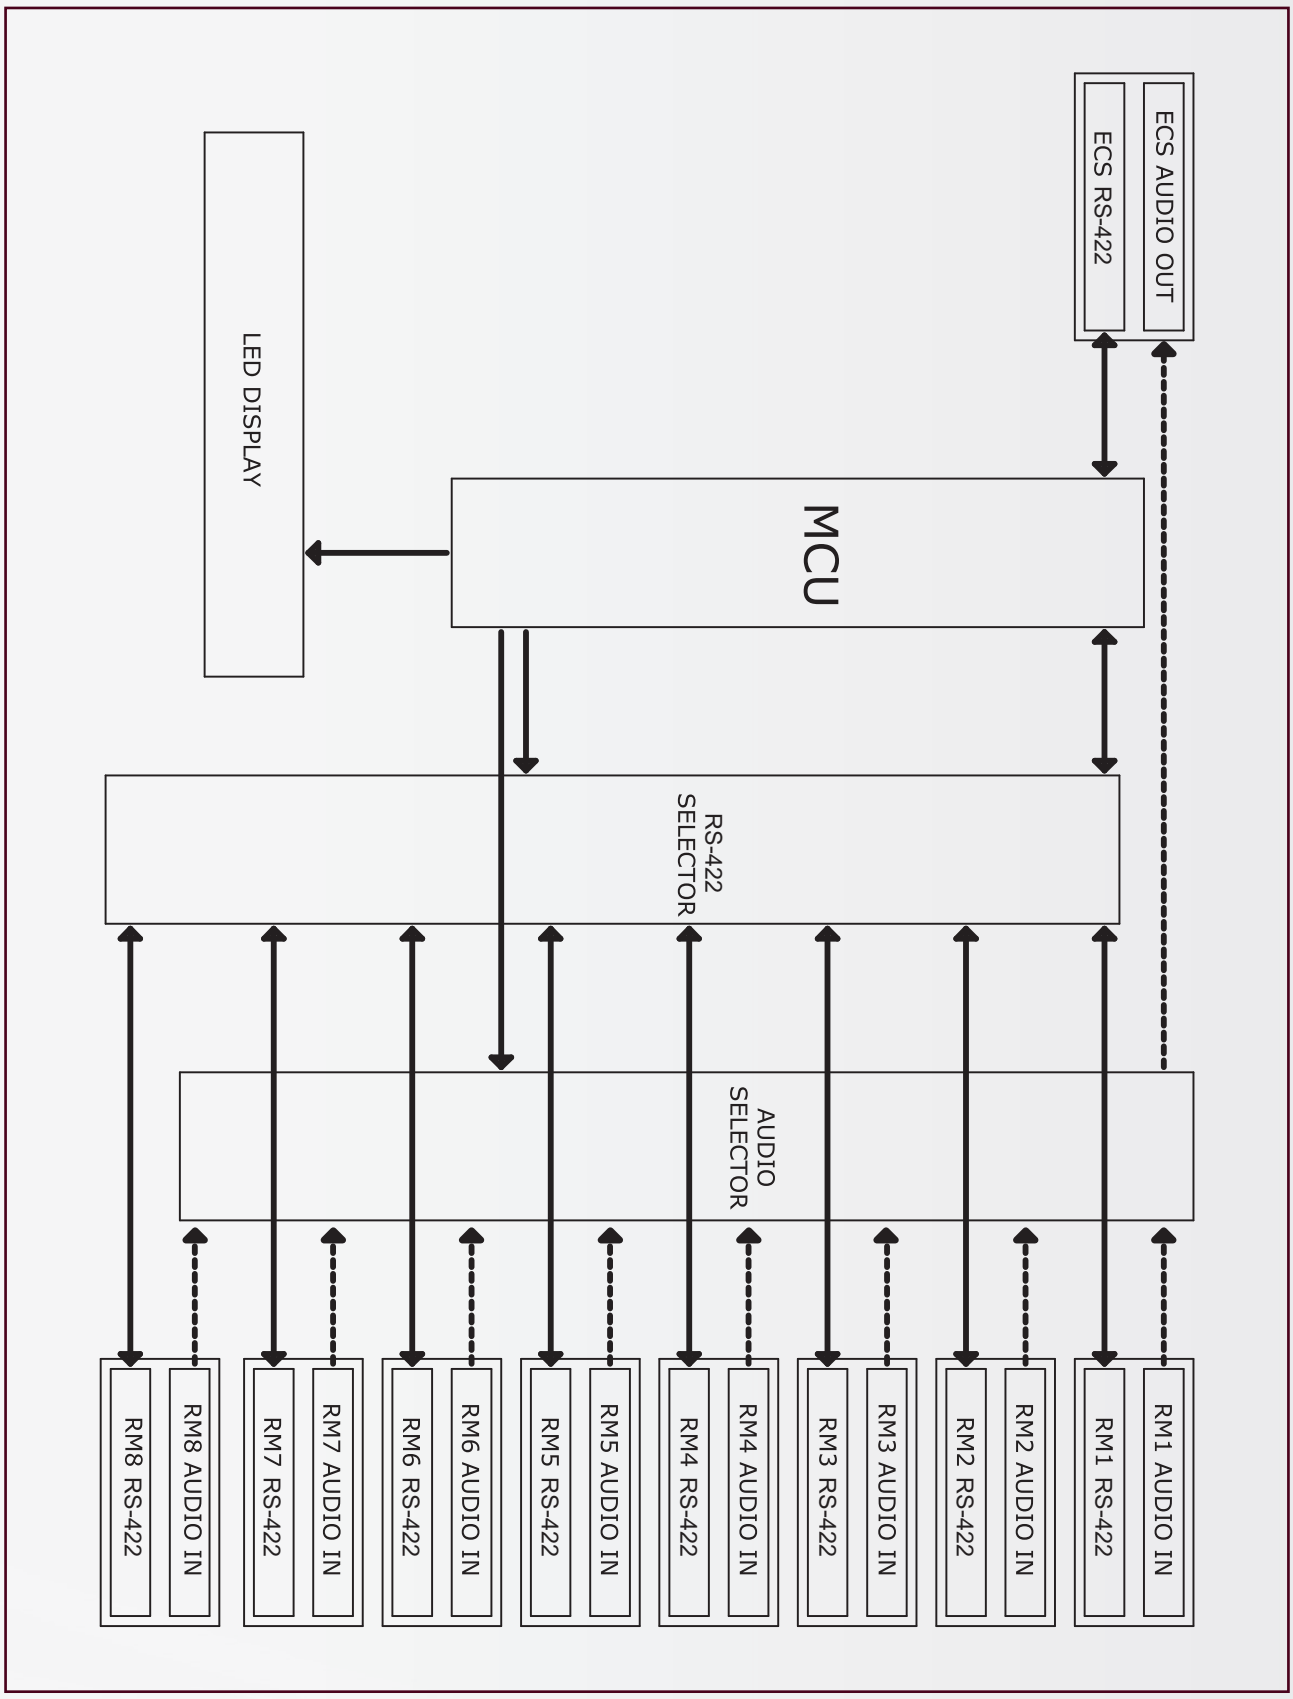

Remote MIC Extender

RME-6108

SPECIFICATIONS

	RME-6108
Channel	8CH
Communications Protocol	RS-422 (Maximum 1km/3,280 feet)
Operating Temperature	-10˚C ~ +40˚C / 14˚F ~ 104˚F
Power Source	DC 24V
Weight (Set)	2.8kg/6.17lbs
Dimensions (Set)	482(W)x44(H)x280(D)mm/19(W)x1.7(H)x11(D)in

※ Specifications and design are subject to change without notice.

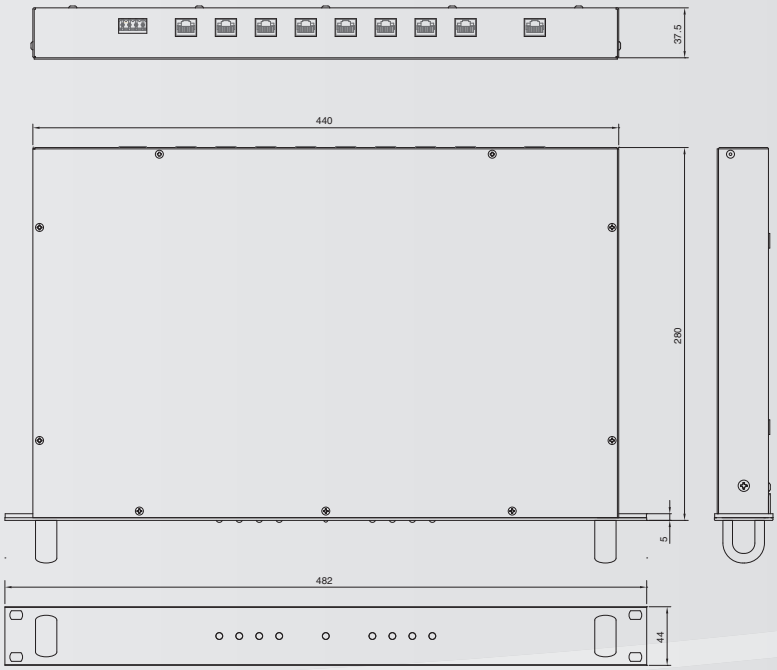

NOTE

REMOTE CONTROLLER

Inter-M Corp. (IMK)
653-5 Banghak-Dong, Dobong-Ku, Seoul, Korea
Overseas Sales Team
Tel_ +82-2-2289-8141~7 Fax_ +82-2-2289-8149 E-mail_ overseas@inter-m.com
www.inter-m.com

* Design and specification are subject to be changed without pre notice.

2015. 4