Chime & Siren

PE-6103



interM

Chime & Siren

PE-6103



- **MULTIPLE TONES**
  - A variety of soft tones are available for your announcements, including two-tone, chime up and chime down.
- **SIREN**
  - Both steady and variable levels of siren tones are available for emergency announcements.
- **REMOTE CONTROL CAPABILITY**
  - Rear-panel terminals are provided for connecting a wired remote control to increase functionality.

FRONT/REAR PANEL



1 CHIME SWITCHES
2 WAVING SIREN SWITCH
3 FLAT SIREN SWITCH
4 OFF SWITCH



1 DC INPUT TERMINALS
2 OUTPUT JACK
3 REMOTE CONTROL TERMINAL

APPLICATIONS

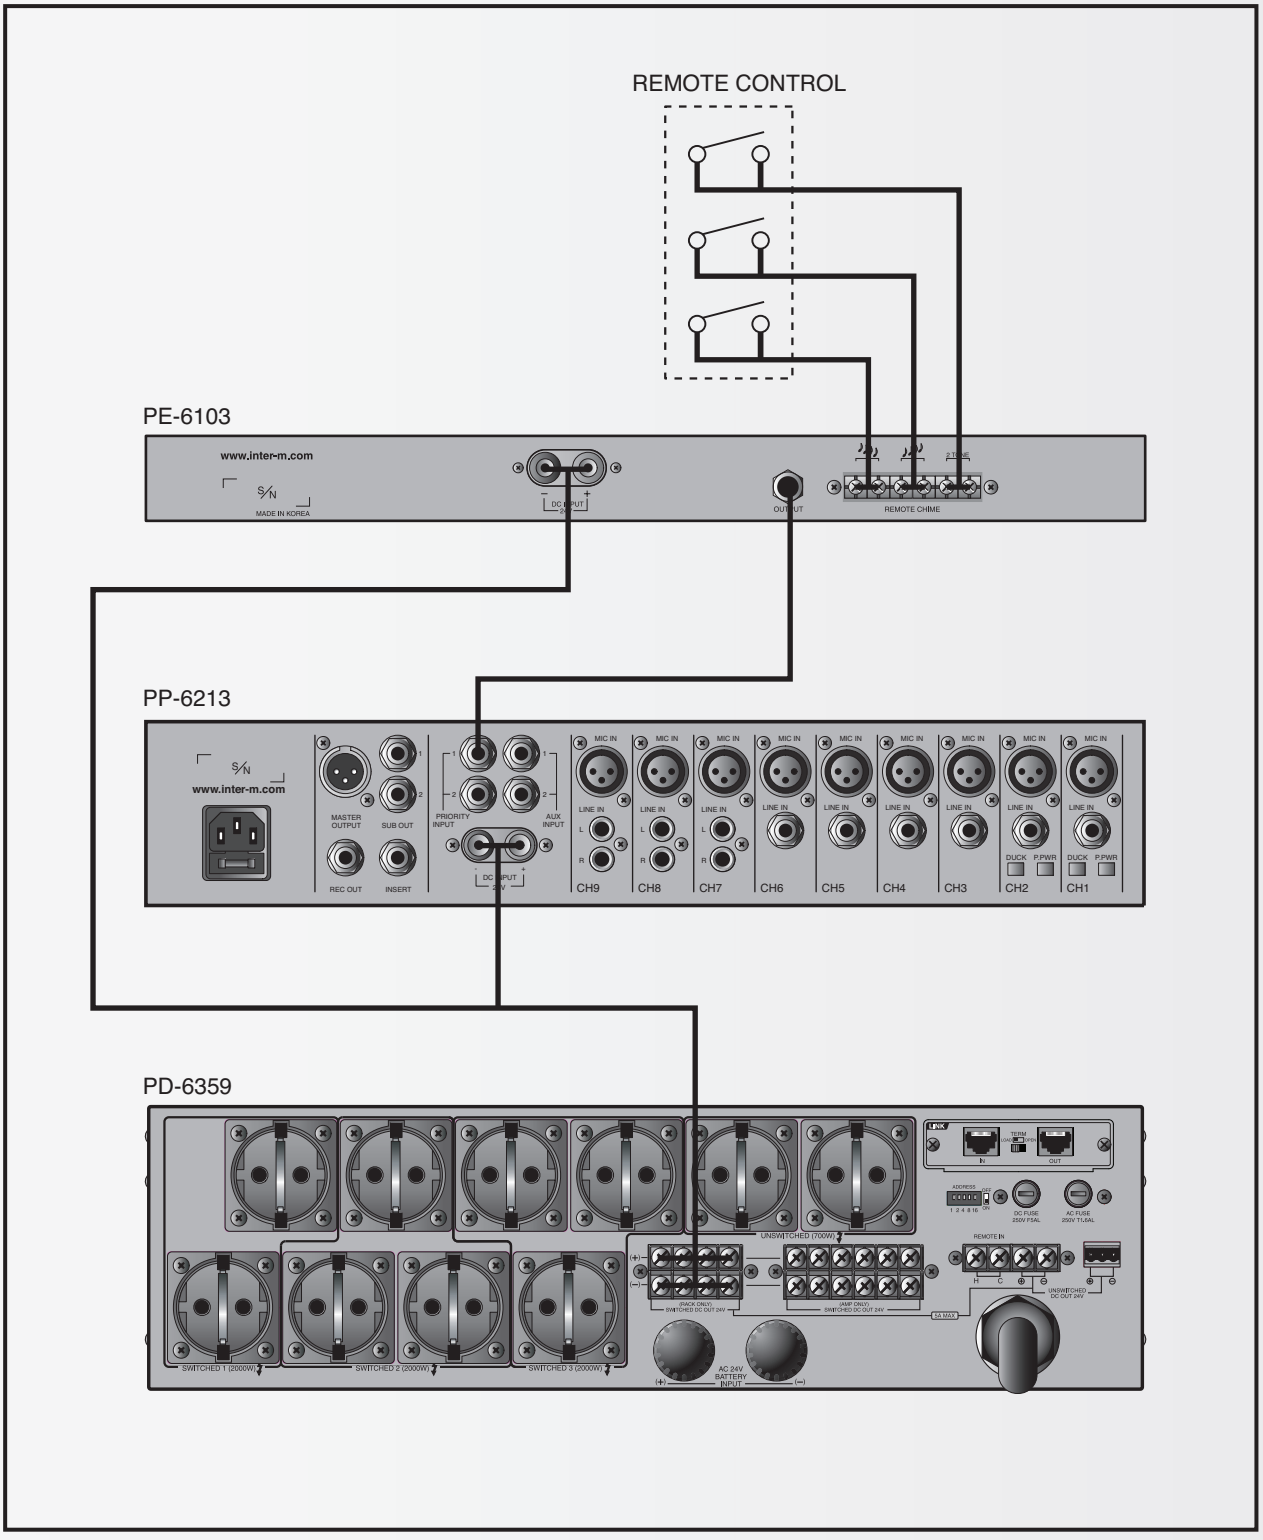

BLOCK DIAGRAM

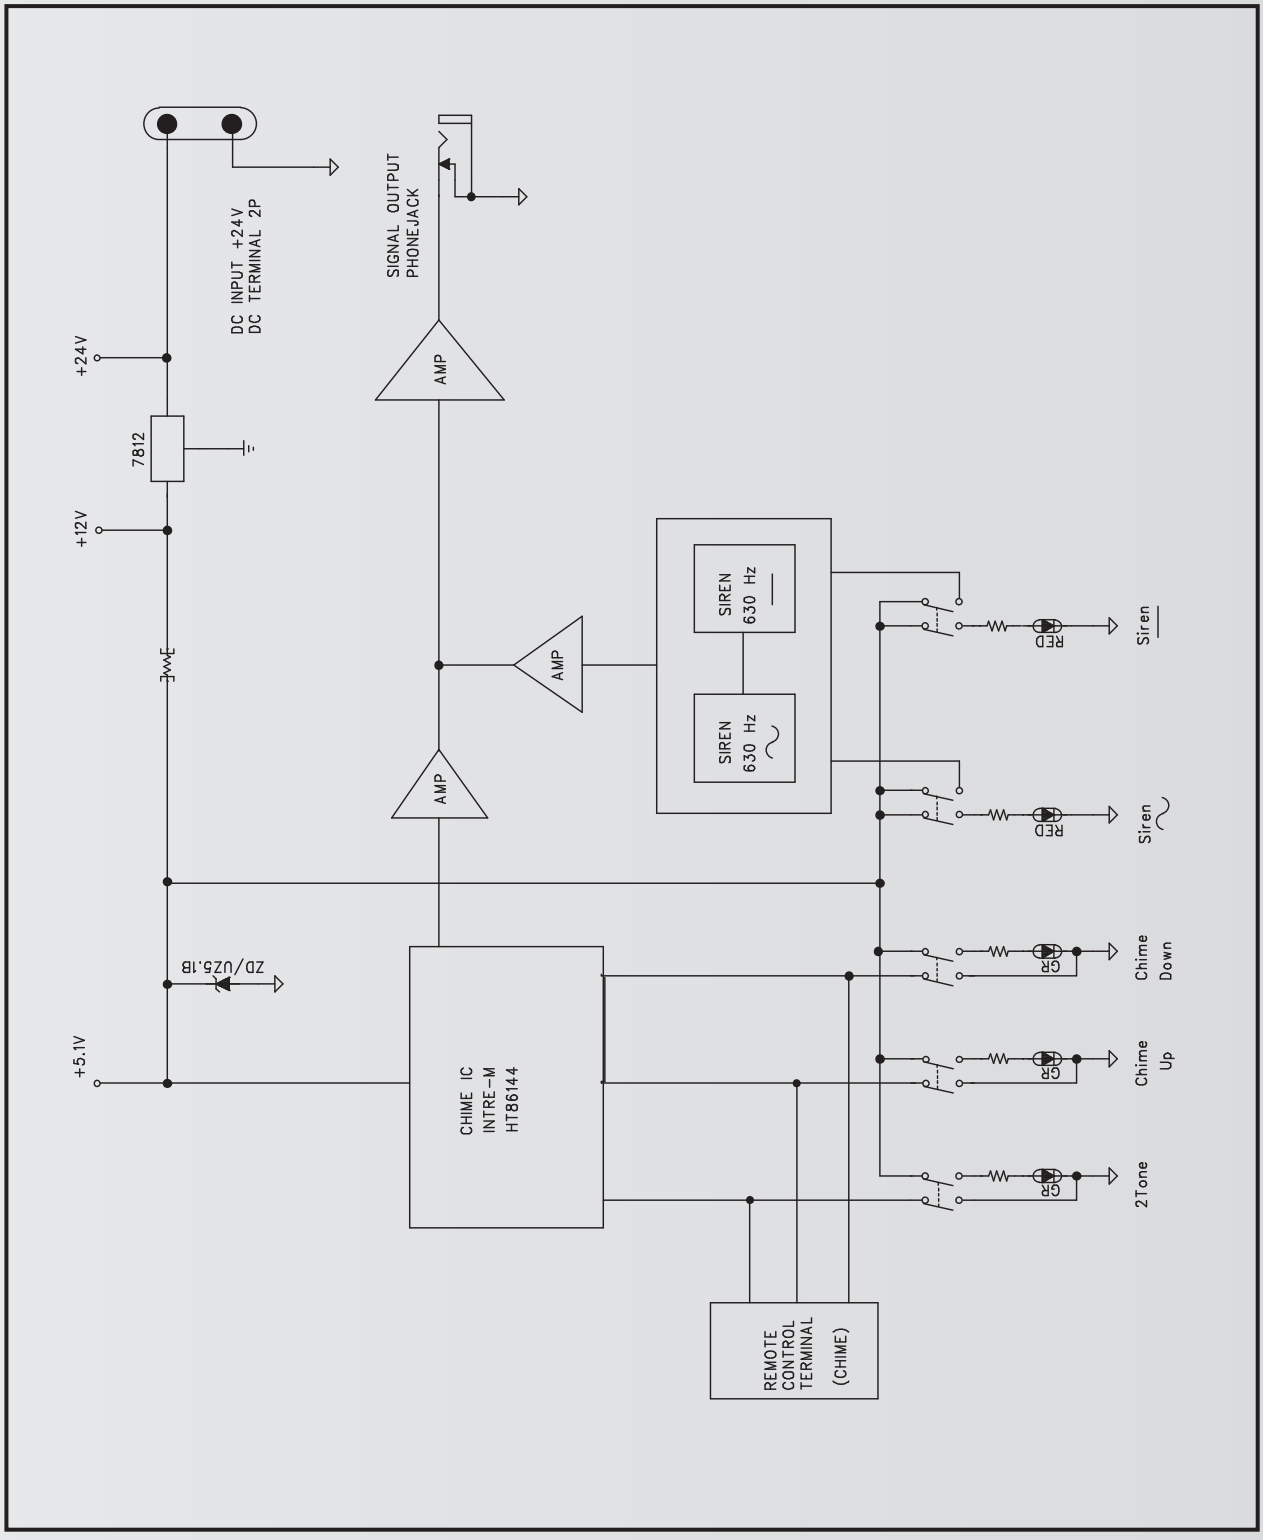

SPECIFICATIONS

	PE-6103
Siren Frequency	630 Hz
Chime and Siren Output Level/Impedance	1Vrms/10kΩ Unbalanced
Operation Temperature	-10°C ~ +40°C / 140°F~104°F
Power Source	24V DC
Power Consumption	60mA
Weight (SET)	2.8kg/6.2lb
Dimensions (SET)	482(W)x44(H)x280(D)mm/19(W)x1.7(H)x11(D)in

DIMENSIONS

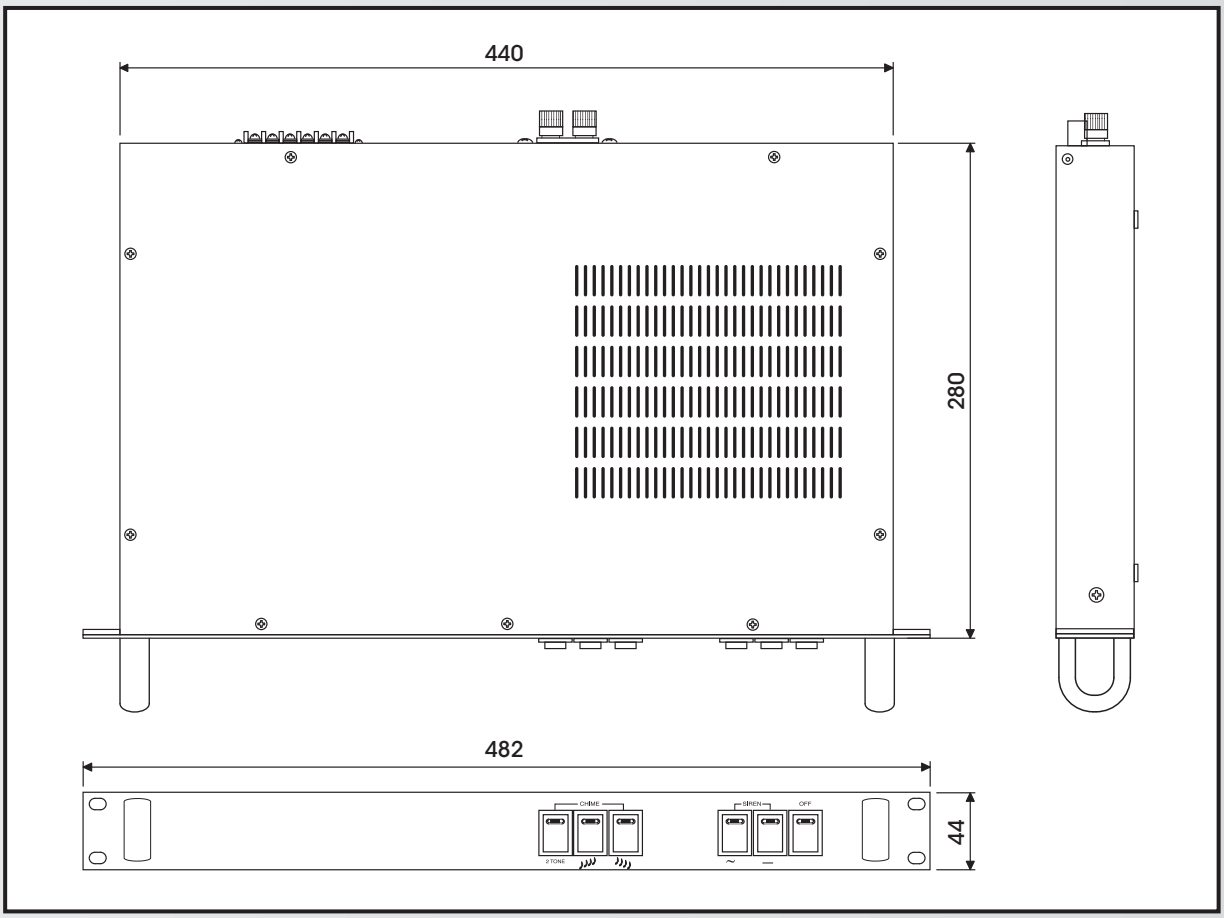

Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team
Tel_ +82-2-2289-8141~7 **Fax_** +82-2-2289-8149 **E-mail_** overseas@inter-m.com **www.inter-m.com**

※ Design and specification are subject to be changed for the improvement of product quality without pre notice.

2015. 4. V1