System Remote MIC Station/Keypad

RM-6024/6012KP



interM

System Remote MIC Station/ 12Key MIC Station Keypad


RM-6024
RM-6012KP



RM-6024 is remote microphone for activating Mic, Chime and BGM by controlling a 6000 SYSTEM from a distance.
RM-6012KP is key pad expansion unit for RM-6024.

- **24 CONTROL KEY**
  - 24 different zone can be controlled with 24 control key.
- **KEY PAD EXPANSION**
  - The control key can be expanded up to 48 keys with RM-6012KP.
- **ZONE MACRO FUNCTION**
  - Many different zone can be set as a single button to operate through PC window program.
- **ALL BUTTON**
  - All button for selecting entire broadcasting zone.
- **MIC BROADCASTING**
  - High spec condensing mic for high quality sound announcement.
- **CHIME BROADCASTING**
  - Chime notification before and after broadcasting.
- **AUX INPUT**
  - Route for external sound source to broadcasting.
- **OUTPUT LEVEL LED**
  - Monitoring a output signal level with LED level meter.
- **BROADCASTING STATUS DISPLAY**
  - It shows the remote amp status with power,communication fault and priority broadcasting.
- **LABEL**
  - Label for distinguishable broadcasting area.
- **CAT5 CABLE**
  - Single Cat5.e line delivers both audio and data which enable to accomplish a easy installation and maintenance.
- **VOLUME CONTROL**
  - Adjusting individual volume of MIC/CHIME/AUX.

FRONT/REAR PANEL

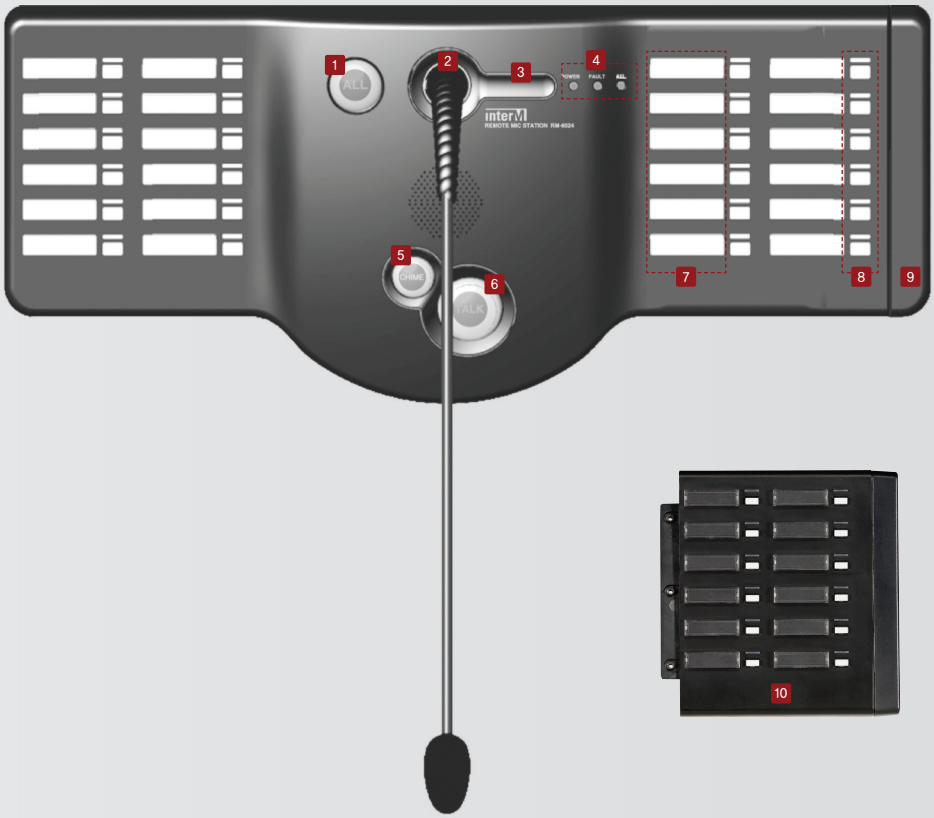

1 ALL BUTTON
2 MIC
3 OUTPUT LEVEL LED
4 POWER/FAULT/BUSY LED
5 CHIME BUTTON
6 TALK ON/OFF BUTTON
7 ZONE DISPLAY LED AND LABEL
8 ZONE SELECTION BUTTON
9 SIDE PAD
10 EXPANSION KEYPAD (RM-6012KP)



1 DC INPUT TERMINAL
2 ADDRESS SWITCH
3 DATA & AUDIO TERMINAL (RJ-45)
4 MIC/AUX/CHIME VOLUME
5 AUX INPUT TERMINAL


System Remote MIC Station/ 12Key MIC Station Keypad

RM-6024/6012KP

SPECIFICATIONS

		RM-6024/6012KP
Channel		24CH
Communication Protocol		RS-422(Maximum 1 km/3,280 feet)
Audio		
MIC	INPUT SENSTIVITY	-60 dB
	THD+N	Less than 0.5 %
	FREQUENCY RESPONSE	120 Hz~20 kHz
	S/N	Better than 50 dB
AUX	INPUT SENSTIVITY	-10 dB
	THD+N	Less than 0.5 %
	FREQUENCY RESPONSE	120 Hz~20 kHz
	S/N	Better than 60 dB
Operation Temperature		-10 °C~+40 °C/14 °F~104 °F
Power Source		DC 24 V
Weight (Set)	RM-6024	1.2 kg/2.6 lbs
	RM-6024KP	250 g/0.55 lbs
Dimensions (Set)	RM-6024	456(W)×65(H)×200(D) mm/17.9(W)×2.5(H)×7.9(D) in
	RM-6024KP	137(W)×54(H)×155(D) mm/5.3(W)×2.1(H)×6.1(D) in

※ Specifications and design are subject to change without notice.

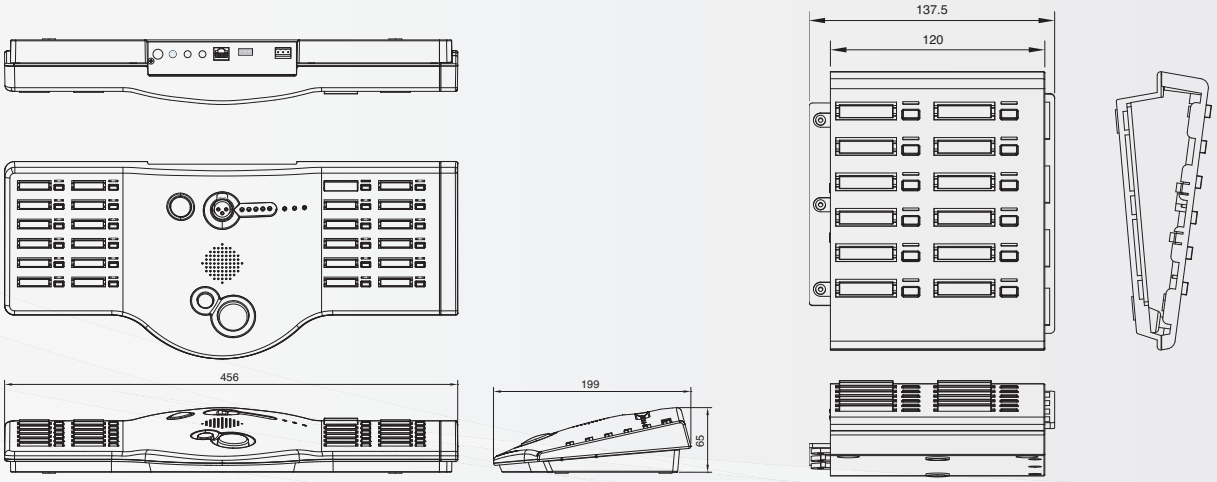

Inter-M Corp. (IMK)

719, Dobong-ro, Dobong-gu, Seoul, Korea
Overseas Sales Team
Tel_ +82-2-2289-8141~7 **Fax_** +82-2-2289-8149 **E-mail_** overseas@inter-m.com **www.inter-m.com**

※ Design and specification are subject to be changed for the improvement of product quality without pre notice.

2015. 6. V2