STAGE MONITOR SPEAKER

SM12



FEATURES

- **12" Passive(2-way coaxial) Stage Monitor**
- **Coverage angles (H×V) : 60°×40°**
- **Monitor Angle 40°**
- **Handle for easy transportation**
- **Black polyurea coating**
- **M10 rigging points for various installations**
- **Socket for Pole Standing**
- **Rubber foot for speaker protection and fixation**

SPECIFICATIONS

Model		SM12
Type		Coaxial 12" Passive Stage Monitor Speaker
Frequency Range (-10dB)		65Hz~20kHz
Frequency Response (±6dB)		75Hz~20kHz
Rated Power (AES)		400W
Rated Power (Program)		800W
Rated Power (Peak)		1600W
Recommended Amplifier Power		800W
Sensitivity (1W/1m)		96dB
Maximum SPL (Peak)		126dB
Nominal Dispersion(HxV)	1kHz	100°×95°
	4kHz	45°×65°
Nominal Impedance		8Ω
Enclosure Material		Birch Plywood 18T
Connectors		3 X SPEAKON(1+,1-)
Fittings/Suspension		14 Point M10 inserts (4-Rear, 4-bottom, 3-Left, 3-Right) /Pole-mounting
Finish		Polyurea Coating
Enclosure Color		Black
Weights		23.8kg / 52.5lb
Dimensions (W×H×D)		502×352×508mm / 19.8×13.9×20in

* Design and specification are subject to be changed for the improvement of product quality without pre notice.
* AES standard, pink noise with 6dB crest factor : 2 hours rated power

STAGE MONITOR SPEAKER

interM PROFESSIONAL

Stage Monitor Speaker

SM12



FREQUENCY RESPONSE

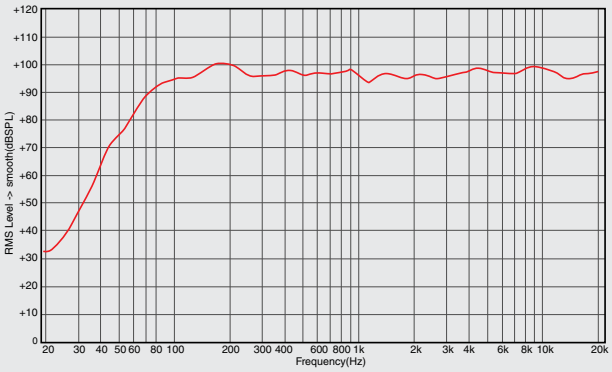

DIMENSIONS



TOP



LEFT



FRONT

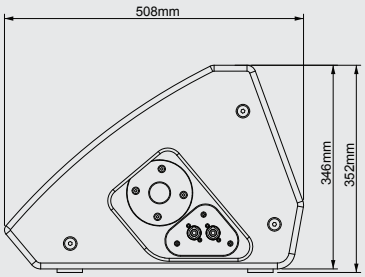

RIGHT

Inter-M Corporation

- **Office :** 719, DOBONG-RO, DOBONG-GU, SEOUL, KOREA
- **Tel :** +82-2-2289-8140~8, **Fax :** +82-2-2289-8149
- **Home page:** http://www.inter-m.com, **E-mail:** overseas@inter-m.com

Inter-M Corp. (IMA)

- **Office :** 5666 CORPORATE AVE. CYPRESS, CA 90630
- **Tel :** +1-714-828-2200, **Fax :** +1-714-828-2210
- **E-mail :** info@inter-m.net, **Home Page :** www.inter-m.net

NO: 152445