Clear Horn Speaker

CH-410/420/430



FEATURES

- **Full range of 1 way speaker system (4″unit)**
- **Indoor or outdoor use**
- **Simple and clear design with their rounded corners and edges**
- **Dispersion control**
- **Easy installation**
- **Wide frequency range and clear sound**
- **IP54**

SPECIFICATIONS

Model		CH-410	CH-420	CH-430
Unit		4″		
Power Handling (AES)		10W	20W	30W
Input Power	100V	10W/5W	20W/10W	30W/15W
	70V	-	-	-
Impedance	100V	1kΩ/2kΩ	500Ω/1kΩ	330Ω/660Ω
	70V	-	-	-
	LOW	-	-	-
Frequency Range (-20%)		114Hz~15kHz	109Hz~20kHz	109Hz~20kHz
Sensitivity (1W/1m)		93dB	93dB	94dB
Maximum SPL [Cont]		103dB	106dB	109dB
Nominal Dispersion (HxV)	1kHz	110° x 140°	110° x 180°	110° x 170°
	4kHz	50° x 40°	50° x 30°	40° x 30°
Weight (Net)		2.9kg / 6.39lb	3.4kg / 7.50lb	3.5kg / 7.72lb
Dimensions (Net, WxHxD)		291 x 154 x 364mm / 11.5 x 6.1 x 14.3in		

* Design and specification are subject to be changed for the improvement of product quality without pre notice.

CLEAR HORN SPEAKER

interM

Clear Horn Speaker

CH-410/420/430

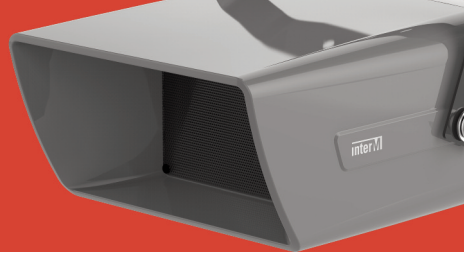

CONNECT THE SPEAKER CABLES

►CH-410



BLACK - COM
WHITE - 1kΩ
GREEN - 2kΩ

►CH-420



BLACK - COM
WHITE - 500Ω
GREEN - 1kΩ

►CH-430



BLACK - COM
WHITE - 330Ω
GREEN - 660Ω

FREQUENCY RESPONSE

►CH-410

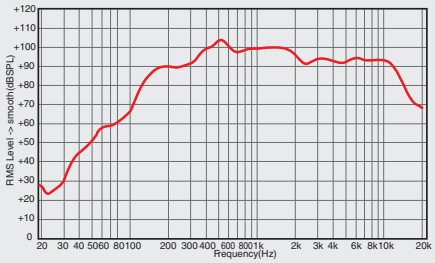

►CH-420

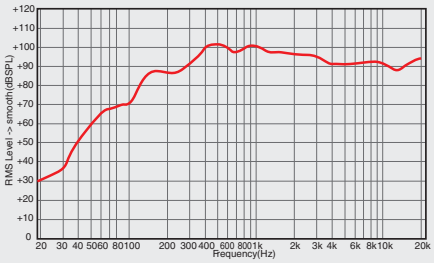

►CH-430

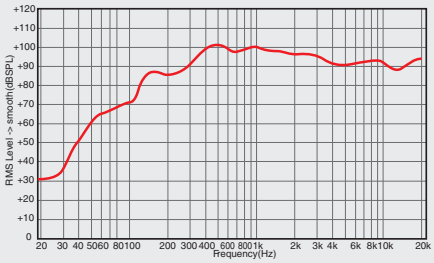

DIMENSIONAL



TOP



FRONT



RIGHT

INSTALLATION

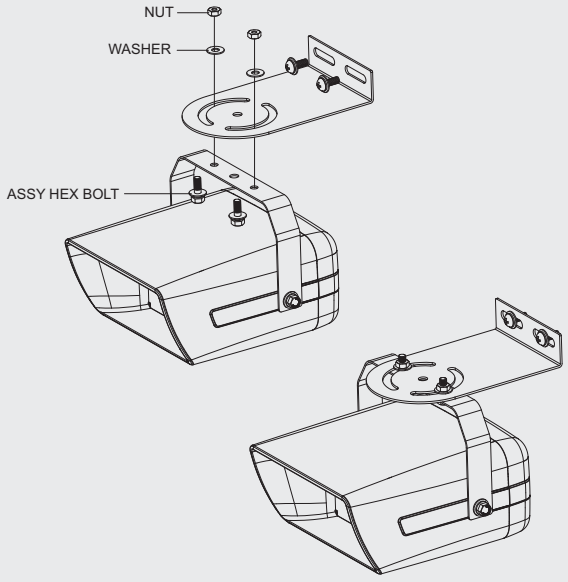

Inter-M Corporation

- **Office :** 719, DOBONG-RO, DOBONG-GU, SEOUL, KOREA
- **Tel :** +82-2-2289-8140~8, **Fax :** +82-2-2289-8149
- **Home page:** http://www.inter-m.com, **E-mail:** overseas@inter-m.com

Inter-M Corp. (IMA)

- **Office :** 5666 CORPORATE AVE. CYPRESS, CA 90630
- **Tel :** +1-714-828-2200, **Fax :** +1-714-828-2210
- **E-mail :** info@inter-m.net, **Home Page :** www.inter-m.net

NO: 152386